


Anneau GrabiQ Avec bord embouti



Nom court de l'article	WLL [kg]	Diamètre de la chaîne	WLL [t]	D [mm]	E [mm]	L [mm]	Poids net [kg]
GrabiQ ML w Flat Access 1.25t	1250	6 mm	1.25	11	60	100	0.2
GrabiQ ML w Flat Access 2.5t	3200	6/8 mm	3.2	13	60	120	0.4
GrabiQ ML w Flat Access 4t	5400	8/10 mm	5.4	17	80	140	0.8
GrabiQ ML w Flat Access 7.5t	8200	10/13 mm	8.2	22	95	160	1.5
GrabiQ ML w Flat Access 10t	13600	13/16 mm	13.6	28	145	275	3.9
GrabiQ ML w Flat Access 17t	20600	16/20 mm	20.6	32	145	275	5.1
GrabiQ ML w Flat Access 25t	32000	20/22 mm	32	40	140	270	8.1

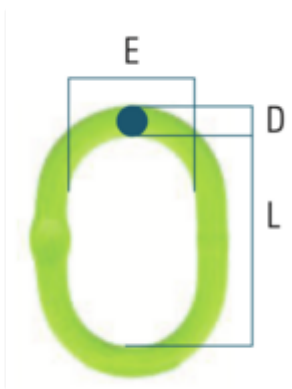

NUMÉROS DE COMMANDE

WLL	GrabiQ ML w Flat Access 1.25t	GrabiQ ML w Flat Access 2.5t	GrabiQ ML w Flat Access 4t	GrabiQ ML w Flat Access 7.5t	GrabiQ ML w Flat Access 10t	GrabiQ ML w Flat Access 17t	GrabiQ ML w Flat Access 25t
1.25 t	2008550	-	-	-	-	-	-
3.2 t	-	2008551	-	-	-	-	-
5.4 t	-	-	2008552	-	-	-	-
8.2 t	-	-	-	2008553	-	-	-
13.6 t	-	-	-	-	2008554	-	-
20.6 t	-	-	-	-	-	2008555	-
32 t	-	-	-	-	-	-	2008556



■ Classe	100
■ Matériel principal	Acier
■ Couleur	Jaune fluo
■ Contenu des unités d'emballage (UE)	1

