


Anschweisspunkt ABA

Der allseitig belastbare starre Anschlagpunkt (kurz «ABA») mit 4-facher Sicherheit gegen Bruch.

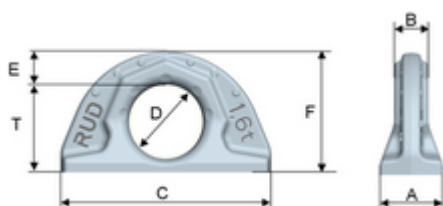

Artikel Name kurz	WLL t auf Ringebene [t]	WLL kg Winkel 0° [kg]	WLL t Winkel 0° [t]	WLL kg Winkel 90° [kg]	WLL t Winkel 90° [t]	A [mm]	B [mm]
ABA0.8	2	800	0.8	800	0.8	22	12
ABA1.6	4	1600	1.6	1600	1.6	30	16
ABA3.2	9	3200	3.2	3200	3.2	41	23
ABA5.0	12	5000	5	5000	5	51	27
ABA10	20	10000	10	10000	10	70	38
ABA20	20	20000	20	20000	20	90	52

Artikel Name kurz	C [mm]	D [mm]	E [mm]	F [mm]	T [mm]	Nettogewicht kg [kg]
ABA0.8	70	32	12	50	38	0.2
ABA1.6	100	35	16	57	41.5	0.44
ABA3.2	137	50	21	80	59	1.1
ABA5.0	172	60	27.5	99	71.5	2.3
ABA10	228	80	35	130	95	5.3
ABA20	272	115	40	175	135	10.7

BESTELLNUMMERN

WLL kg Winkel 0°	ABA0.8	ABA1.6	ABA3.2	ABA5.0	ABA10	ABA20
800 kg	2009236	-	-	-	-	-
1600 kg	-	2009316	-	-	-	-
3200 kg	-	-	2009317	-	-	-
5000 kg	-	-	-	2009318	-	-
10000 kg	-	-	-	-	2009319	-
20000 kg	-	-	-	-	-	2009320

■ Normen	EN 1677-1 ISO 12100
■ Hauptmaterial	Stahl
■ Farbe	Grau
■ Temperaturbereich	-40° C to + 200° C
■ Verpackungseinheit (VPE) Inhalt	1

