




Demi-maille d'accouplement ronde

Demi-maille d'accouplement ronde

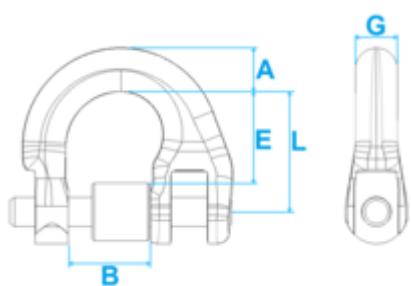

| Nom court de l'article | WLL [kg] | Diamètre de la chaîne | WLL [t] | A [mm] | B [mm] | E [mm] | G [mm] |
|------------------------|-------------|-----------------------|------------|-----------|-----------|-----------|-----------|
| SKT-7/8-8 G80 2t | 2000 | 8 mm | 2 | 11 | 18 | 22 | 9 |
| SKT-10-8 G80 3.2t | 3200 | 10 mm | 3.2 | 13 | 25 | 26 | 12 |
| SKT-13-8 G80 5.3t | 5300 | 13 mm | 5.3 | 16 | 29 | 33 | 15 |
| SKT-16-8 G80 8t | 8000 | 16 mm | 8 | 20 | 36 | 40 | 19 |
| SKT-18/20-8 G80 12.5t | 12500 | 18/20 mm | 12.5 | 23 | 43 | 48 | 22 |
| SKT-22-8 G80 15.5t | 15500 | 22 mm | 15.5 | 26 | 50 | 59 | 24 |
| SKT-26-8 G80 21.6t | 21600 | 26 mm | 21.6 | 33 | 58 | 61 | 29 |

| Nom court de l'article | L [mm] | Poids net [kg] |
|------------------------|-----------|-------------------|
| SKT-7/8-8 G80 2t | 28 | 0.09 |
| SKT-10-8 G80 3.2t | 34 | 0.18 |
| SKT-13-8 G80 5.3t | 44 | 0.39 |
| SKT-16-8 G80 8t | 52 | 0.65 |
| SKT-18/20-8 G80 12.5t | 63 | 1.1 |
| SKT-22-8 G80 15.5t | 75 | 1.7 |
| SKT-26-8 G80 21.6t | 80 | 2.6 |

NUMÉROS DE COMMANDE

| WLL | SKT-7/8-8 G80 2t | SKT-10-8 G80 3.2t | SKT-13-8 G80 5.3t | SKT-16-8 G80 8t | SKT-18/20-8 G80 12.5t | SKT-22-8 G80 15.5t | SKT-26-8 G80 21.6t |
|--------|------------------|-------------------|-------------------|-----------------|-----------------------|--------------------|--------------------|
| 2 t | 2008719 | - | - | - | - | - | - |
| 3.2 t | - | 2008720 | - | - | - | - | - |
| 5.3 t | - | - | 2008721 | - | - | - | - |
| 8 t | - | - | - | 2008722 | - | - | - |
| 12.5 t | - | - | - | - | 2008723 | - | - |
| 15.5 t | - | - | - | - | - | 2008724 | - |
| 21.6 t | - | - | - | - | - | - | 2008725 |

| | |
|-------------------------------------|---------|
| Normes | EN 1677 |
| Classe | 80 |
| Matériel principal | Acier |
| Couleur | Jaune |
| Contenu des unités d'emballage (UE) | 1 |



