


Drahtseilschleufe mit Schmiedekopf Für Maschinentransporte und Betonfertigteile



Artikel Name kurz	WLL [kg]	WLL [t]	WLL t Winkel 0° [t]	WLL kg Winkel 0°-45° [kg]	G [mm]	L [mm]	Nettogewicht kg [kg]
GOS12	500	0.5	0.5	500	12	335	0.3
GOS14	800	0.8	0.8	800	14	335	0.4
GOS16	1200	1.2	1.2	1200	16	385	0.5
GOS18	1600	1.6	1.6	1600	18	470	1.2
GOS20	2000	2	2	2000	20	470	0.5
GOS30	4000	4	4	4000	30	590	0.7
GOS36	6300	6.3	6.3	6300	36	780	7.7
GOS42	8000	8	8	8000	42	860	9
GOS52	12500	12.5	12.5	12500	52	1080	15.2

Artikel Name kurz	Farbe
GOS12	Orange
GOS14	Weiss
GOS16	Rot
GOS18	Rosa
GOS20	Hellgrün
GOS30	Olivgrün
GOS36	Blau
GOS42	Grau
GOS52	Gelb



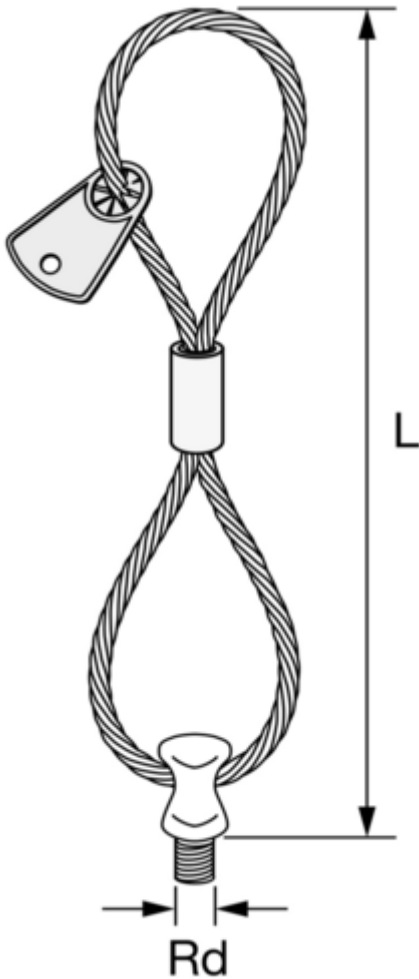

BESTELLNUMMERN

Abmessung G	GOS12	GOS14	GOS16	GOS18	GOS20	GOS30	GOS36	GOS42	GOS52
12 mm	2020136	-	-	-	-	-	-	-	-
14 mm	-	2020137	-	-	-	-	-	-	-
16 mm	-	-	2020138	-	-	-	-	-	-
18 mm	-	-	-	2020139	-	-	-	-	-
20 mm	-	-	-	-	2020140	-	-	-	-
30 mm	-	-	-	-	-	2020142	-	-	-
36 mm	-	-	-	-	-	-	2020143	-	-
42 mm	-	-	-	-	-	-	-	2020144	-
52 mm	-	-	-	-	-	-	-	-	2020145



■ Hauptmaterial	Stahl
■ Verpackungseinheit (VPE) Inhalt	1

