


## Exoset - Vertical lifting clamp

Suitable for lifting, vertical transport, turning 180° moving and vertical transfer of sheet, plates and constructions.

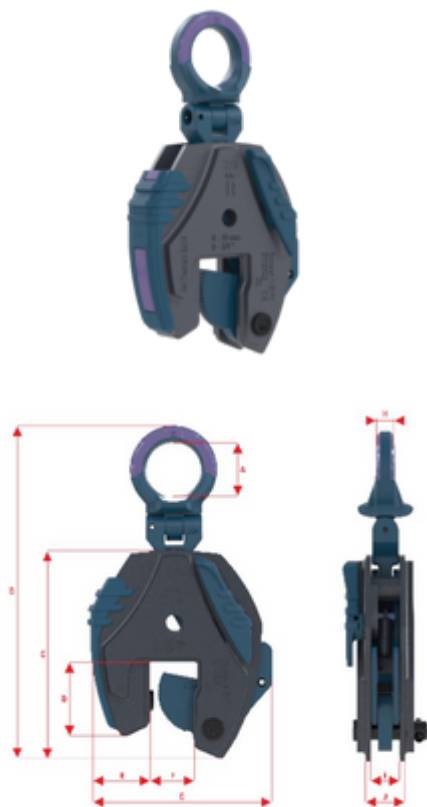

| Item Name short | Weight Net [lbs] | WLL Vertical [lbs] | Dimension A [in] | Dimension B [in] | Dimension C [in] | Dimension D [in] | Dimension E [in] |
|-----------------|------------------|--------------------|------------------|------------------|------------------|------------------|------------------|
| 0.5t EVU        | 4.19             | 1100               | 1.53             | 8.22             | 5.27             | 1.57             | 1.73             |
| 0.5t EVU/H      | 4.19             | 1100               | 1.53             | 8.91             | 5.29             | 1.59             | 1.63             |
| 0.5t EVU/S      | 4.19             | 1100               | 1.53             | 8.91             | 5.29             | 1.59             | 1.63             |
| 1t EVU          | 4.63             | 2204               | 1.53             | 9.35             | 5.73             | 2.06             | 1.74             |
| 1t EVU/H        | 4.63             | 2204               | 1.53             | 9.35             | 5.73             | 2.06             | 1.74             |
| 1t EVU/S        | 4.63             | 2204               | 1.53             | 9.35             | 5.73             | 2.06             | 1.74             |
| 2t EVU          | 16.75            | 4409               | 2.68             | 14.78            | 8.24             | 2.99             | 2.43             |
| 2t EVU/H        | 16.75            | 4409               | 2.68             | 14.78            | 8.24             | 2.99             | 2.43             |
| 2t EVU/S        | 16.75            | 4409               | 2.68             | 14.78            | 8.24             | 2.99             | 2.43             |
| 3t EVU          | 32.63            | 6613               | 2.89             | 17.56            | 10.34            | 4.01             | 2.80             |
| 3t EVU/H        | 32.63            | 6613               | 2.89             | 17.56            | 10.34            | 4.01             | 2.80             |
| 3t EVU/S        | 32.63            | 6613               | 2.89             | 17.56            | 10.34            | 4.01             | 2.80             |
| 5t EVU          | 35.27            | 11023              | 2.89             | 17.56            | 10.34            | 4.01             | 2.80             |
| 5t EVU/H        | 35.27            | 11023              | 2.89             | 17.56            | 10.34            | 4.01             | 2.80             |
| 5t EVU/S        | 35.27            | 11023              | 2.89             | 17.56            | 10.34            | 4.01             | 2.80             |
| 6t EVU          | 52.91            | 13227              | 3.15             | 21.64            | 12.89            | 5.19             | 2.84             |
| 6t EVU/H        | 52.91            | 13227              | 3.15             | 21.64            | 12.89            | 5.19             | 2.84             |
| 6t EVU/S        | 52.91            | 13227              | 3.15             | 21.64            | 12.89            | 5.19             | 2.84             |

| Item Name short | Dimension F [in] | Dimension G [in] | Dimension H [in] | For Material              | Dimension I [in] | Dimension J [in] | EAN Code      |
|-----------------|------------------|------------------|------------------|---------------------------|------------------|------------------|---------------|
| 0.5t EVU        | 0.86             | 4.33             | 0.51             | Normal max.37HRC          | 0.78             | 1.10             | 7610726106356 |
| 0.5t EVU/H      | 0.88             | 4.49             | 0.53             | Hard max.47HRC            | 0.80             | 1.12             | 7610726106363 |
| 0.5t EVU/S      | 0.88             | 4.49             | 0.53             | Stainless Steel max.37HRC | 0.80             | 1.12             | 7610726106370 |
| 1t EVU          | 1.12             | 5.00             | 0.53             | Normal max.37HRC          | 0.80             | 1.12             | 7610726106387 |
| 1t EVU/H        | 1.12             | 5.00             | 0.53             | Hard max.47HRC            | 0.80             | 1.12             | 7610726106394 |
| 1t EVU/S        | 1.12             | 5.00             | 0.53             | Stainless Steel max.37HRC | 0.80             | 1.12             | 7610726106417 |



| Item Name short | Dimension F [in] | Dimension G [in] | Dimension H [in] | For Material              | Dimension I [in] | Dimension J [in] | EAN Code      |
|-----------------|------------------|------------------|------------------|---------------------------|------------------|------------------|---------------|
| 2t EVU          | 1.90             | 7.58             | 0.71             | Normal max.37HRC          | 1.26             | 1.73             | 7610726106424 |
| 2t EVU/H        | 1.90             | 7.58             | 0.71             | Hard max.47HRC            | 1.26             | 1.73             | 7610726106431 |
| 2t EVU/S        | 1.90             | 7.58             | 0.71             | Stainless Steel max.37HRC | 1.26             | 1.73             | 7610726106448 |
| 3t EVU          | 2.17             | 8.85             | 0.90             | Normal max.37HRC          | 1.65             | 2.28             | 7610726106455 |
| 3t EVU/H        | 2.17             | 8.85             | 0.90             | Hard max.47HRC            | 1.65             | 2.28             | 7610726106462 |
| 3t EVU/S        | 2.17             | 8.85             | 0.90             | Stainless Steel max.37HRC | 1.65             | 2.28             | 7610726106479 |
| 5t EVU          | 2.17             | 8.85             | 0.90             | Normal max.37HRC          | 1.65             | 2.44             | 7610726106486 |
| 5t EVU/H        | 2.17             | 8.85             | 0.90             | Hard max.47HRC            | 1.65             | 2.44             | 7610726106493 |
| 5t EVU/S        | 2.17             | 8.85             | 0.90             | Stainless Steel max.37HRC | 42               | 2.44             | 7610726106516 |
| 6t EVU          | 2.32             | 11.06            | 1.46             | Normal max.37HRC          | 1.65             | 2.44             | 7610726106523 |
| 6t EVU/H        | 2.32             | 11.06            | 1.46             | Hard max.47HRC            | 1.65             | 2.44             | 7610726106530 |
| 6t EVU/S        | 2.32             | 11.06            | 1.46             | Stainless Steel max.37HRC | 1.65             | 2.44             | 7610726106547 |



## ORDER NUMBERS

| WLL Vertical | For Material              | Jaw Opening Width | 0.5 t   | 1 t     | 2 t     | 3 t     | 5 t     | 6 t     |
|--------------|---------------------------|-------------------|---------|---------|---------|---------|---------|---------|
| 1100 lbs     | Normal max.37HRC          | 0 - 16 mm         | 2002421 | -       | -       | -       | -       | -       |
| 1100 lbs     | Stainless Steel max.37HRC | 0 - 16 mm         | 2012567 | -       | -       | -       | -       | -       |
| 1100 lbs     | Hard max.47HRC            | 0 - 16 mm         | 2012561 | -       | -       | -       | -       | -       |
| 2204 lbs     | Normal max.37HRC          | 0 - 20 mm         | -       | 2002422 | -       | -       | -       | -       |
| 2204 lbs     | Stainless Steel max.37HRC | 0 - 20 mm         | -       | 2012568 | -       | -       | -       | -       |
| 2204 lbs     | Hard max.47HRC            | 0 - 20 mm         | -       | 2012562 | -       | -       | -       | -       |
| 4409 lbs     | Normal max.37HRC          | 0 - 35 mm         | -       | -       | 2002423 | -       | -       | -       |
| 4409 lbs     | Stainless Steel max.37HRC | 0 - 35 mm         | -       | -       | 2012569 | -       | -       | -       |
| 4409 lbs     | Hard max.47HRC            | 0 - 35 mm         | -       | -       | 2012563 | -       | -       | -       |
| 6613 lbs     | Normal max.37HRC          | 0 - 40 mm         | -       | -       | -       | 2002424 | -       | -       |
| 6613 lbs     | Stainless Steel max.37HRC | 0 - 40 mm         | -       | -       | -       | 2012570 | -       | -       |
| 6613 lbs     | Hard max.47HRC            | 0 - 40 mm         | -       | -       | -       | 2012564 | -       | -       |
| 11023 lbs    | Normal max.37HRC          | 0 - 40 mm         | -       | -       | -       | -       | 2002425 | -       |
| 11023 lbs    | Stainless Steel max.37HRC | 0 - 40 mm         | -       | -       | -       | -       | 2012571 | -       |
| 11023 lbs    | Hard max.47HRC            | 0 - 40 mm         | -       | -       | -       | -       | 2012565 | -       |
| 13227 lbs    | Normal max.37HRC          | 0 - 50 mm         | -       | -       | -       | -       | -       | 2002426 |
| 13227 lbs    | Stainless Steel max.37HRC | 0 - 50 mm         | -       | -       | -       | -       | -       | 2012572 |
| 13227 lbs    | Hard max.47HRC            | 0 - 50 mm         | -       | -       | -       | -       | -       | 2012566 |

- Norms EN 13155 ASME B30.20 DNV GL
- Packaging Unit (PU) Content 1

