


## Lastbockgewinde VLBG-PLUS

Volle Tragfähigkeit in alle Lastrichtungen

| Artikel Name kurz | WLL kg Winkel 0° [kg] | WLL t Winkel 0° [t] | WLL kg Winkel 90° [kg] | WLL t Winkel 90° [t] | A [mm] | B [mm] | C [mm] |
|-------------------|-----------------------|---------------------|------------------------|----------------------|--------|--------|--------|
| VLBG+M8           | 630                   | 0.63                | 630                    | 0.63                 | 30     | 54     | 34     |
| VLBG+M10          | 900                   | 0.9                 | 900                    | 0.9                  | 30     | 54     | 34     |
| VLBG+M12          | 1350                  | 1.35                | 1350                   | 1.35                 | 32     | 54     | 34     |
| VLBG+M16          | 2000                  | 2                   | 2000                   | 2                    | 33     | 56     | 36     |
| VLBG+M20          | 3500                  | 3.5                 | 3500                   | 3.5                  | 50     | 82     | 54     |
| VLBG+M24          | 4500                  | 4.5                 | 4500                   | 4.5                  | 50     | 82     | 54     |
| VLBG+M30          | 6700                  | 6.7                 | 6700                   | 6.7                  | 60     | 103    | 65     |
| VLBG+M36          | 8000                  | 8                   | 8000                   | 8                    | 77     | 122    | 85     |
| VLBG+(10)M42      | 10000                 | 10                  | 10000                  | 10                   | 77     | 122    | 82     |
| VLBG+(15)M42      | 15000                 | 15                  | 15000                  | 15                   | 95     | 156    | 100    |
| VLBG+M48          | 20000                 | 20                  | 20000                  | 20                   | 95     | 156    | 100    |

| Artikel Name kurz | D [mm] | E [mm] | F [mm] | G [mm] | H [mm] | I [mm] | K [mm] |
|-------------------|--------|--------|--------|--------|--------|--------|--------|
| VLBG+M8           | 24     | 40     | 10     | 29     | 11     | 75     | 45     |
| VLBG+M10          | 24     | 39     | 10     | 29     | 15     | 75     | 45     |
| VLBG+M12          | 26     | 38     | 10     | 29     | 18     | 75     | 45     |
| VLBG+M16          | 30     | 39     | 13.5   | 36     | 22     | 86     | 47     |
| VLBG+M20          | 45     | 55     | 16.5   | 43     | 32     | 113    | 64     |
| VLBG+M24          | 45     | 67     | 18     | 43     | 37     | 130    | 78     |
| VLBG+M30          | 60     | 67     | 22.5   | 61     | 49     | 151    | 80     |
| VLBG+M36          | 70     | 97     | 26.5   | 77     | 63     | 205    | 110    |
| VLBG+(10)M42      | 70     | 94     | 26.5   | 77     | 73     | 205    | 110    |
| VLBG+(15)M42      | 85     | 109    | 36     | 87     | 63     | 230    | 130    |
| VLBG+M48          | 95     | 105    | 36     | 84     | 73     | 230    | 130    |

| Artikel Name kurz | L [mm] | M [mm] | N [mm] | T [mm] | Nettogewicht kg [kg] |
|-------------------|--------|--------|--------|--------|----------------------|
| VLBG+M8           | 40     | 8      | 32     | 75     | 0.3                  |
| VLBG+M10          | 44     | 10     | 32     | 75     | 0.32                 |
| VLBG+M12          | 47     | 12     | 32     | 75     | 0.33                 |

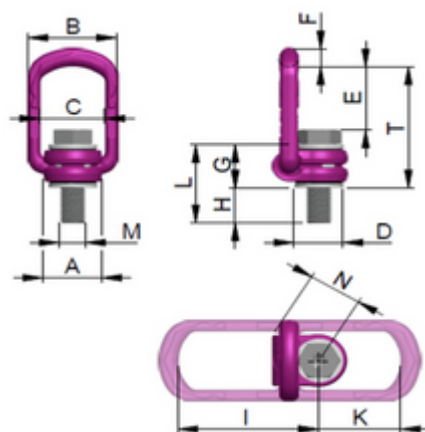

| Artikel Name kurz | L<br>[mm] | M<br>[mm] | N<br>[mm] | T<br>[mm] | Nettogewicht kg<br>[kg] |
|-------------------|-----------|-----------|-----------|-----------|-------------------------|
| VLBG+M16          | 58        | 16        | 38        | 85        | 0.55                    |
| VLBG+M20          | 75        | 20        | 48        | 110       | 1.3                     |
| VLBG+M24          | 80        | 24        | 48        | 125       | 1.5                     |
| VLBG+M30          | 110       | 30        | 67        | 147       | 3.3                     |
| VLBG+M36          | 140       | 36        | 87        | 197       | 6.2                     |
| VLBG+(10)M42      | 150       | 42        | 70        | 197       | 6.7                     |
| VLBG+(15)M42      | 150       | 42        | 100       | 222       | 11.2                    |
| VLBG+M48          | 160       | 48        | 100       | 222       | 11.6                    |

## BESTELLNUMMERN

| WLL t<br>Winkel<br>0° | VLBG+M8 | VLBG+M10 | VLBG+(10)M42 | VLBG+M12 | VLBG+(15)M42 | VLBG+M16 | VLBG+M20 | VLBG+M24 | VLBG+M30 | VLBG+M36 | VLBG+M48 |
|-----------------------|---------|----------|--------------|----------|--------------|----------|----------|----------|----------|----------|----------|
| 0.63 t                | 2009220 | -        | -            | -        | -            | -        | -        | -        | -        | -        | -        |
| 0.9 t                 | -       | 2009221  | -            | -        | -            | -        | -        | -        | -        | -        | -        |
| 1.35 t                | -       | -        | -            | 2009222  | -            | -        | -        | -        | -        | -        | -        |
| 2 t                   | -       | -        | -            | -        | -            | 2009223  | -        | -        | -        | -        | -        |
| 3.5 t                 | -       | -        | -            | -        | -            | -        | 2009224  | -        | -        | -        | -        |
| 4.5 t                 | -       | -        | -            | -        | -            | -        | -        | 2009225  | -        | -        | -        |
| 6.7 t                 | -       | -        | -            | -        | -            | -        | -        | -        | 2009226  | -        | -        |
| 8 t                   | -       | -        | -            | -        | -            | -        | -        | -        | -        | 2009227  | -        |
| 10 t                  | -       | -        | 2009228      | -        | -            | -        | -        | -        | -        | -        | -        |
| 15 t                  | -       | -        | -            | -        | 2009258      | -        | -        | -        | -        | -        | -        |
| 20 t                  | -       | -        | -            | -        | -            | -        | -        | -        | -        | -        | 2009259  |

|                                   |                     |
|-----------------------------------|---------------------|
| ■ Normen                          | EN 1677-1 ISO 12100 |
| ■ Hauptmaterial                   | Stahl               |
| ■ Farbe                           | Rosa                |
| ■ Temperaturbereich               | -40°C bis +100°C    |
| ■ Verpackungseinheit (VPE) Inhalt | 1                   |

