


Manille lyre à axe boulonné goupillé Green Pin

Manille lyre avec axe boulonné goupillé

Nom court de l'article	WLL [kg]	Classe	WLL [t]	A [mm]	Dimension B [mm]	Dimension C [mm]	Dimension D [mm]
GreenPin B SB 0.75t	500	60	0.5	12	8	29	7
GreenPin B SB 0.75t	750	60	0.75	13	10	32	9
GreenPin B SB 1t	1000	60	1	17	11	36.5	10
GreenPin B SB 1.5t	1500	60	1.5	19	13	43	11
GreenPin B SB 2t	2000	60	2	22	16	51	13.5
GreenPin B SB 3.25t	3250	60	3.25	27	19	64	16
GreenPin B SB 4.75t	4750	60	4.75	31	22	76	19
GreenPin B SB 6.5t	6500	60	6.5	36	25	83	22
GreenPin B SB 8.5t	8500	60	8.5	43	28	95	25
GreenPin B SB 9.5t	9500	60	9.5	47	32	108	28
GreenPin B SB 12t	12000	60	12	51	35	115	32
GreenPin B SB 13.5t	13500	60	13.5	57	38	133	35
GreenPin B SB 17t	17000	60	17	60	42	146	38
GreenPin B SB 25t	25000	60	25	74	50	178	45
GreenPin B SB 35t	35000	60	35	83	57	197	50
GreenPin B SB 42.5t	42500	60	42.5	95	65	222	57
GreenPin B SB 55t	55000	60	55	105	70	260	65
GreenPin B SB 85t	85000	60	85	127	83	329	75
GreenPin B SB 120t	120000	80	120	146	95	400	95

Nom court de l'article	Facteur de sécurité	Dimension E [mm]	Dimension F [mm]	Dimension H [mm]	Dimension M [mm]	Poids net [kg]
GreenPin B SB 0.75t	6:1	20	16.5	48.5	4	0.06
GreenPin B SB 0.75t	6:1	22	20	56	5	0.10
GreenPin B SB 1t	6:1	26	22.5	63.5	8	0.17
GreenPin B SB 1.5t	6:1	29	26.5	74	11	0.24
GreenPin B SB 2t	6:1	32	34	89	13	0.38
GreenPin B SB 3.25t	6:1	43	40	110	17	0.7
GreenPin B SB 4.75t	6:1	51	46	129	19	1

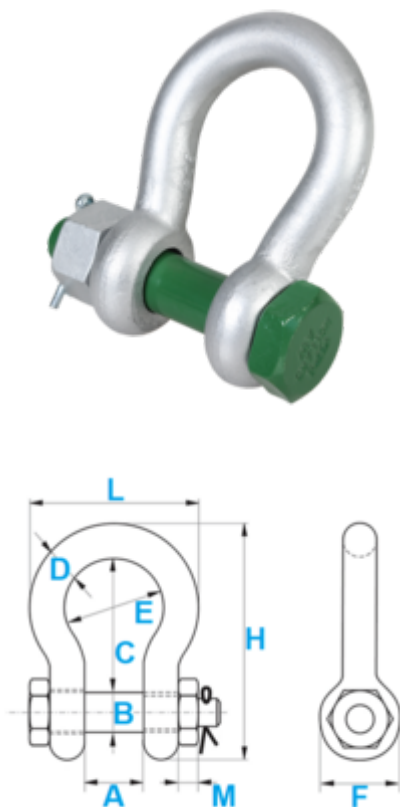

Nom court de l'article	Facteur de sécurité	Dimension E [mm]	Dimension F [mm]	Dimension H [mm]	Dimension M [mm]	Poids net [kg]
GreenPin B SB 6.5t	6:1	58	52	144	22	1.7
GreenPin B SB 8.5t	6:1	68	59	164	25	2.6
GreenPin B SB 9.5t	6:1	75	66	185	27	3.8
GreenPin B SB 12t	6:1	83	72	201	30	4.8
GreenPin B SB 13.5t	6:1	92	80	227	33	7
GreenPin B SB 17t	6:1	99	88	249	19	8.5
GreenPin B SB 25t	6:1	126	103	300	23	16
GreenPin B SB 35t	6:1	138	111	331	26	21
GreenPin B SB 42.5t	6:1	160	130	377	29	24.61
GreenPin B SB 55t	6:1	180	145	433	32	42
GreenPin B SB 85t	6:1	190	163	527	39	69
GreenPin B SB 120t	5:1	238	204	644	-	70



NUMÉROS DE COMMANDE

WLL	GreenPin B SB 0.75t	GreenPin B SB 1t	GreenPin B SB 1.5t	GreenPin B SB 2t	GreenPin B SB 3.25t	GreenPin B SB 4.75t	GreenPin B SB 6.5t	GreenPin B SB 8.5t	GreenPin B SB 9.5t	GreenPin B SB 12t	GreenPin B SB 13.5t
0.5 t	2015287	-	-	-	-	-	-	-	-	-	-
0.75 t	2009156	-	-	-	-	-	-	-	-	-	-
1 t	-	2009157	-	-	-	-	-	-	-	-	-
1.5 t	-	-	2009158	-	-	-	-	-	-	-	-
2 t	-	-	-	2009159	-	-	-	-	-	-	-
3.25 t	-	-	-	-	2009160	-	-	-	-	-	-
4.75 t	-	-	-	-	-	2009161	-	-	-	-	-
6.5 t	-	-	-	-	-	-	2009162	-	-	-	-
8.5 t	-	-	-	-	-	-	-	2009163	-	-	-
9.5 t	-	-	-	-	-	-	-	-	2009164	-	-
12 t	-	-	-	-	-	-	-	-	-	2002612	-
13.5 t	-	-	-	-	-	-	-	-	-	-	2009165
17 t	-	-	-	-	-	-	-	-	-	-	-
25 t	-	-	-	-	-	-	-	-	-	-	-
35 t	-	-	-	-	-	-	-	-	-	-	-
42.5 t	-	-	-	-	-	-	-	-	-	-	-
55 t	-	-	-	-	-	-	-	-	-	-	-
85 t	-	-	-	-	-	-	-	-	-	-	-
120 t	-	-	-	-	-	-	-	-	-	-	-

WLL	GreenPin B SB 17t	GreenPin B SB 25t	GreenPin B SB 35t	GreenPin B SB 42.5t	GreenPin B SB 55t	GreenPin B SB 85t	GreenPin B SB 120t
0.5 t	-	-	-	-	-	-	-
0.75 t	-	-	-	-	-	-	-
1 t	-	-	-	-	-	-	-
1.5 t	-	-	-	-	-	-	-
2 t	-	-	-	-	-	-	-
3.25 t	-	-	-	-	-	-	-
4.75 t	-	-	-	-	-	-	-
6.5 t	-	-	-	-	-	-	-
8.5 t	-	-	-	-	-	-	-
9.5 t	-	-	-	-	-	-	-
12 t	-	-	-	-	-	-	-
13.5 t	-	-	-	-	-	-	-



WLL	GreenPin B SB 17t	GreenPin B SB 25t	GreenPin B SB 35t	GreenPin B SB 42.5t	GreenPin B SB 55t	GreenPin B SB 85t	GreenPin B SB 120t
17 t	2009166	-	-	-	-	-	-
25 t	-	2002613	-	-	-	-	-
35 t	-	-	2002614	-	-	-	-
42.5 t	-	-	-	2002615	-	-	-
55 t	-	-	-	-	2002616	-	-
85 t	-	-	-	-	-	2009167	-
120 t	-	-	-	-	-	-	2009168

■ Normes	EN 13889
■ Matériel principal	Acier
■ Couleur	Argent
■ Plage de température	-40° C to + 200° C
■ Qualité	Professional
■ Contenu des unités d'emballage (UE)	1

