


Émerillon à billes isolé

Isolé jusqu'à 1000 Volt

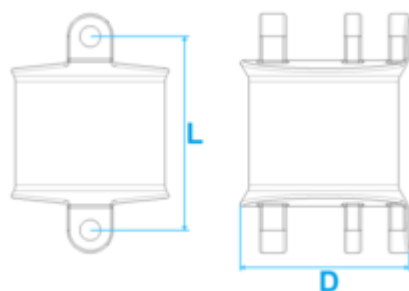

Nom court de l'article	WLL [kg]	WLL [t]	Poids net [kg]
SKLI-7/8-8 G80 2t	2000	2	0.7
SKLI-10-8 G80 3.2t	3200	3.2	1.4
SKLI-13-8 G80 5.3t	5300	5.3	2.9
SKLI-16-8 G80 8t	8000	8	4.9
SKLI-18/20-8 G80 12.5t	12500	12.5	7.2

NUMÉROS DE COMMANDE

WLL	SKLI-7/8-8 G80 2t	SKLI-10-8 G80 3.2t	SKLI-13-8 G80 5.3t	SKLI-16-8 G80 8t	SKLI-18/20-8 G80 12.5t
2 t	2015252	-	-	-	-
3.2 t	-	2015253	-	-	-
5.3 t	-	-	2015254	-	-
8 t	-	-	-	2015255	-
12.5 t	-	-	-	-	2015256

■ Normes	EN 1677 ISO 8539
■ Matériel principal	Acier
■ Couleur	Jaune
■ Contenu des unités d'emballage (UE)	1



