




Point d'ancrage textile

Premier point d'ancrage textile avec WLL totale testée et garantie.

Nom court de l'article	WLL kg Angle 0° [kg]	WLL t angle 0° [t]	WLL kg Angle 90° [kg]	WLL t angle 90° [t]	A [mm]	B [mm]	C [mm]
TXP-M16-50	1300	1.3	1300	1.3	30	34	60
TXP-M16-100	1300	1.3	1300	1.3	30	34	60
TXP-M20-50	2000	2	2000	2	30	34	60
TXP-M20-100	2000	2.0	2000	2	38	45	88
TXP-M24-50	3000	3	3000	3	38	45	88
TXP-M24-100	3000	3	3000	3	38	45	88

Nom court de l'article	D [mm]	M [mm]	Poids net [kg]
TXP-M16-50	57	16	0.82
TXP-M16-100	57	16	1.06
TXP-M20-50	57	20	1.6
TXP-M20-100	80	20	1.8
TXP-M24-50	80	24	2.6
TXP-M24-100	80	24	2.9



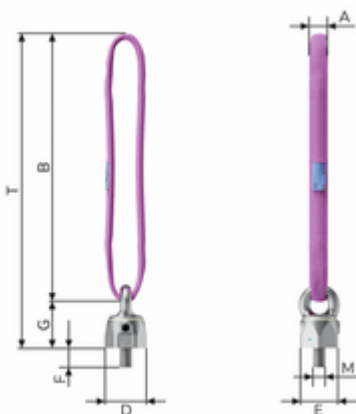

NUMÉROS DE COMMANDE

Dimension B	1.3 t	2 t	2.0 t	3 t
34 mm	2030301,2030302	2030303	-	-
45 mm	-	2030304	-	2030305,2030306

■ Normes	EN 1677 ISO 12100
■ Matériel principal	Acier
■ Couleur	Violet
■ Plage de température	-40° C to + 200° C
■ Contenu des unités d'emballage (UE)	1

