


Ringbockgewinde

Can be loaded from all sides and offers 4-fold safety

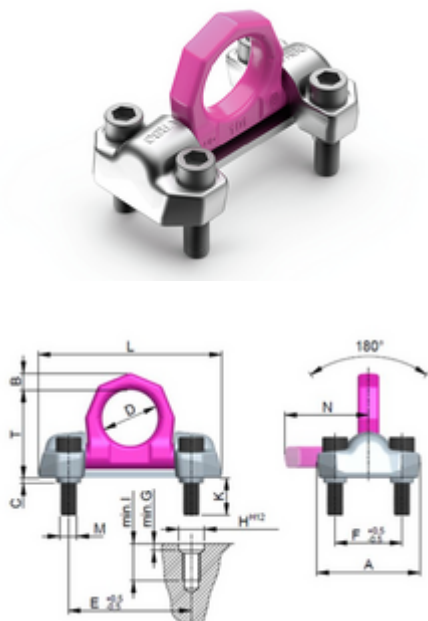

Artikel Name kurz	WLL kg Winkel 0° [kg]	WLL t Winkel 0° [t]	WLL kg Winkel 90° [kg]	WLL t Winkel 90° [t]	A [mm]	B [mm]	C [mm]
VRBG 10	10000	10	10000	10	125	22	6
VRBG 16	16000	16	16000	16	170	30	8

Artikel Name kurz	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	K [mm]
VRBG 10	65	143	78	8	30	50	43
VRBG 16	90	198	104	10	46	70	63

Artikel Name kurz	L [mm]	M [mm]	N [mm]	T [mm]	Nettogewicht kg [kg]
VRBG 10	213	20	100	103	4.1
VRBG 16	270	30	134	131	11.3

BESTELLNUMMERN

WLL t Winkel 0°	VRBG 10	VRBG 16
10 t	2009276	-
16 t	-	2009277

■ Normen	ISO 12100 EN 1677-1
■ Hauptmaterial	Stahl
■ Farbe	Rosa
■ Temperaturbereich	-20°C bis +100°C
■ Verpackungseinheit (VPE) Inhalt	1

