


Ringbockgewinde

Loadable on all sites, with 4-times safety

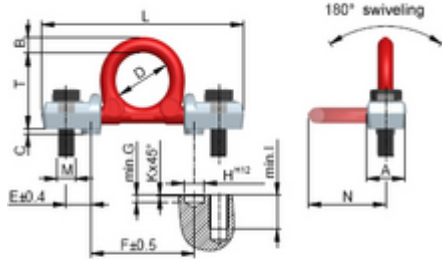

Artikel Name kurz	WLL kg Winkel 0° [kg]	WLL t Winkel 0° [t]	WLL kg Winkel 90° [kg]	WLL t Winkel 90° [t]	Sicherheitsfaktor	A [mm]	B [mm]
RBG 3	3000	3	3000	3	4:1	34	16

Artikel Name kurz	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]
RBG 3	5	48	22	92	6	18	30

Artikel Name kurz	K [mm]	L [mm]	M [mm]	N [mm]	T [mm]	Nettogewicht kg [kg]	Hauptmaterial
RBG 3	1	178	16	71	67	0.9	Stahl

Artikel Name kurz	Temperaturbereich	Verpackungseinheit (VPE) Inhalt	Farbe
RBG 3	-20°C bis +100°C	1	Rot

BESTELLNUMMERN

RBG 3

2009232

- Normen ISO 12100 EN 1677-1
- Hauptmaterial Stahl
- Farbe Rot
- Nettogewicht kg 0.9 kg
- Temperaturbereich -20°C bis +100°C
- Verpackungseinheit (VPE) Inhalt 1

