




Ringbock schweissbar

Allseitig belastbarer, bis 180° schwenkbarer Aufhängebügel

Artikel Name kurz	WLL kg Winkel 0° [kg]	WLL t Winkel 0° [t]	WLL kg Winkel 90° [kg]	WLL t Winkel 90° [t]	A [mm]	B [mm]	C [mm]
VRBS 4	4000	4	4000	4	62	14	28
VRBS 6.7	6700	6.7	6700	6.7	88	20	39
VRBS 10	10000	10	10000	10	100	22	46
VRBS 16	16000	16	16000	16	130	30	57
VRBS 30	31500	31.5	31500	31.5	160	42	78
VRBS 50	50000	50	50000	50	240	70	120

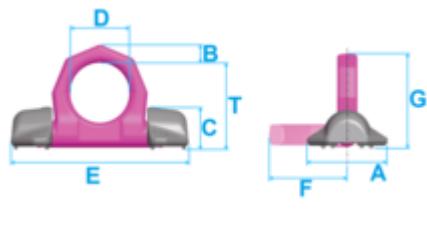

Artikel Name kurz	D [mm]	E [mm]	F [mm]	G [mm]	T [mm]	Nettogewicht kg [kg]
VRBS 4	48	135	71	85	65	0.8
VRBS 6.7	60	170	92	104	84	1.6
VRBS 10	65	195	100	117	95	3
VRBS 16	90	263	134	157	127	6.6
VRBS 30	130	373	195	220	178	15.6
VRBS 50	230	620	340	383	313	54

BESTELLNUMMERN

WLL kg Winkel 0°	VRBS 4	VRBS 6.7	VRBS 10	VRBS 16	VRBS 30	VRBS 50
4000 kg	2009233	-	-	-	-	-
6700 kg	-	2009246	-	-	-	-
10000 kg	-	-	2009247	-	-	-
16000 kg	-	-	-	2009248	-	-
31500 kg	-	-	-	-	2009249	-
50000 kg	-	-	-	-	-	2009250

- Normen
- Hauptmaterial
- Farbe
- Verpackungseinheit (VPE) Inhalt

ISO 12100 EN 1677-1
Stahl
Rosa
1

