

SpanSet®

01



Height Safety
Lifting
Load Control
Safety Management

SAVERLINE



SpanSet®



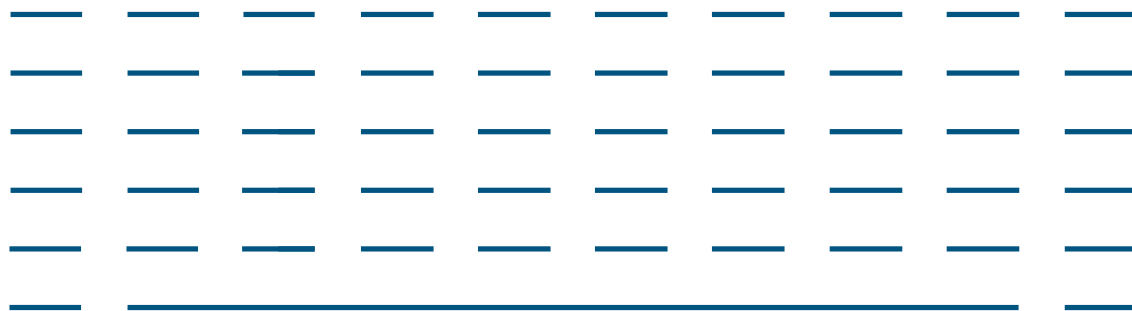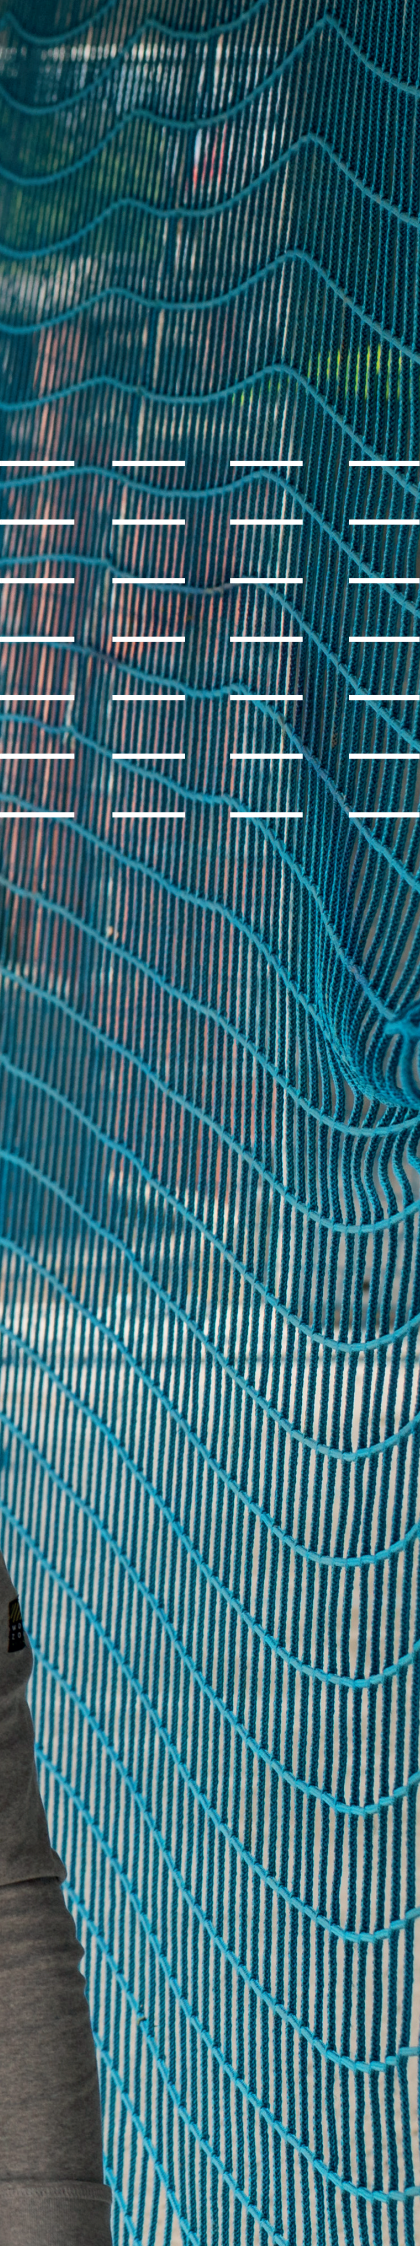

SpanSet – competence and passion for your safety


As one of the world's leading manufacturers of synthetic fibre lifting slings, load control ratchet systems, height safety harnesses and lanyards, SpanSet also takes the lead when it comes to self-retracting lifeline.

Our knowledge of height safety solutions extends from basic personal fall protection to permanent lifelines, confined space access, rescue systems and collective fall protection systems, such as guardrails, nets and tensioned access platforms.

SpanSet attribute the success of our products to our good listening skills when working in partnership with end users, our depth of experience in the many applications of our products and our policy of continual research and developments covering all applications.

All SpanSet products have been developed to work as part of an overall safety solution incorporating consultancy, design, supply, rental, installations, training, implementation, testing and servicing. By offering our customers an overall solution we are better able to meet the customers' needs and help them develop safer solutions for work at height.

SpanSet – Certified Safety

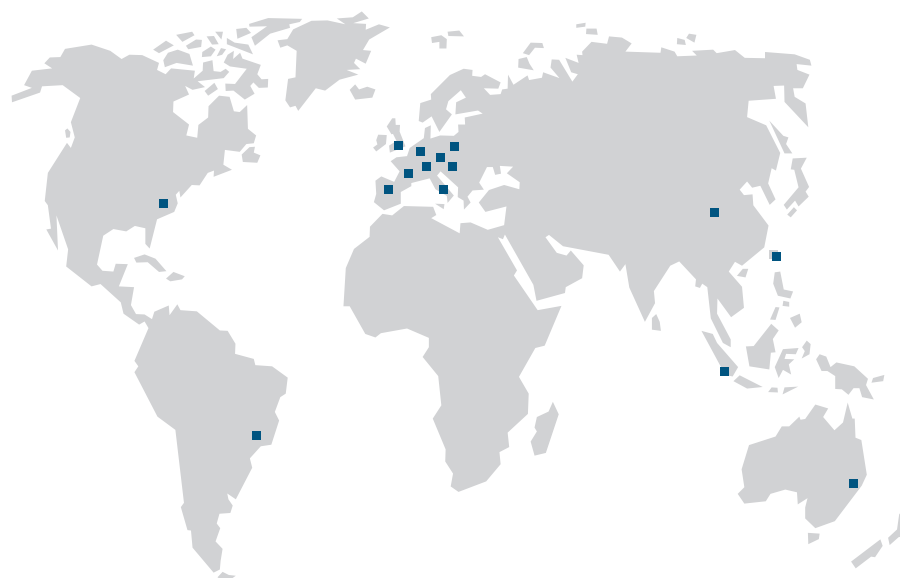



Saverline – How it works and what are your benefits


Saverline self retracting lifelines in accordance with EN 360:2002 are produced for maximum durability using outstanding technology for the demanding conditions of the workplace. All the components important for the safe functioning of the device are made from rustproof material, aluminum or stainless steel and shockproof plastic. This sturdy method of construction ensures that Saverline self retracting lifelines are always reliable in use and especially low-maintenance.

The Saverline self retracting lifelines are similar to a car safety belts in the way they work. A re-coiling spring keeps the lifeline taught allowing it to respond immediately in the event of a fall without a slack rope.

If the working speed (approx. 1.5 m/sec.) is exceeded, the catches which activate the brake system lock into place as a result of centrifugal forces. The energy absorption required for height-safety devices is attained via a new type of brake system (disk brake) which can only be set from the inside.

Arrest force values, which you can see on the diagram below, are independent of any weather situation or application and far below the 6 kN limit specified by the EN standard.

SpanSet – Certified Safety

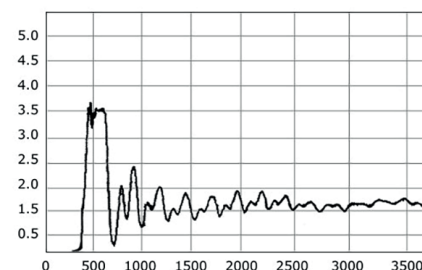



The name indicates what it stands for – a certified safe line for your daily work

All Saverline self retracting lifelines are constructed according to EN 360:2002 and have the requisite test approvals (CE 0299).

Saverline self retracting lifelines are used when working on high buildings, chimneys, roofs and at other workplaces involving a fall hazard. We also provide solutions for safety-relevant and problematic work areas (e.g. silos, shafts).

Saverline self retracting lifelines function in any location position and have been tested in a simulated fall trial over an edge.

Edge testing information



Requirements corresponding to the VG 11 Additional Testing guidance "Height-safety devices for horizontal use over a sharp edge"

To put things simply: Saverline self retracting lifelines fulfill this standard!

All Saverline self retracting lifelines are tested in accordance with the optional additional VG 11 'edge test' requirement. Saverlines unique webbing used in the self-retractable lanyards is just 2.5mm thick, 25 mm wide, with a breaking load of 34kN, a high-tech product developed by the SpanSet engineers. The webbing Saverline use has a Dyneema core – giving one of the highest performances of this type of fibre in this application.

In addition to Saverlines unique webbing used in their retractable type fall arresters, SpanSet have worked together with the manufacturer of the Galvanized Steel Cable used as lifelines in their devices to develop a test procedure to ensure the best performance of the Galvanized Steel Cable lifelines used in Saverline self retracting lifeline. Both Saverline's webbing and Galvanized Steel Cable lifelines used in the retractable type fall arresters, ensures the safety of the user during a fall over a sharp edge (r=0.5mm), for example a smooth steel edge or a rough concrete edge.

Saverline self retracting lifelines are certified in accordance with CE by the test and certification body of the "Personal Safety Equipment" technical committee. The functional capability of the height-safety devices is guaranteed by testing them in extreme situations (e.g. heat, cold, damp).

Saverline retractable type fall arresters are not only top quality German workmanship, they comply with the newest and toughest safety standards in the world!

List of the requirements for the EN 360:

- Design and ergonomics
- Materials and construction
- Blocking after pre-treatment
- Blocking in a horizontal position
- Static load bearing capacity
- Static load bearing capacity for horizontal applications
- Dynamic performance
- Dynamic performance for horizontal applications
- Dynamic load bearing capacity for horizontal applications
- Optional requirement in respect to fatigue strength
- Corrosion resistance Identification and information

Explanation for the device names

SRL = **S**elf **R**etracting **L**ifeline
 SRLR = **S**elf **R**etracting **L**ifeline **R**escue
 A = Aluminium Housing | P = Plastic Housing
 W = Webbing Lifeline | S = Steel Cable Lifeline |
 DR = Dyneema Rope | SS = Stainless Steel Cable Lifeline |
 SDE = Steel Double Action EN Karabiner
 SDU = Steel Triple Action ANSI Anchor Karabiner
 STU = Steel Triple Action ANSI Anchor Karabiner
 ATA = Aluminium Triple Action Swivel Karabiner (EN)
 STA = Steel Triple Action Swivel Karabiner (ANSI)
 SRH = Steel Rebar Hook (ANSI)

Example:
 Safeline - SRL SDU P W 3.5 STA means:
 Self Retracting Lifeline with a Steel Double Action Karabiner, Plastic Housing, a Webbing Lifeline and an Steel Triple Action Swivel Karabiner.

Approved for vertical and horizontal use



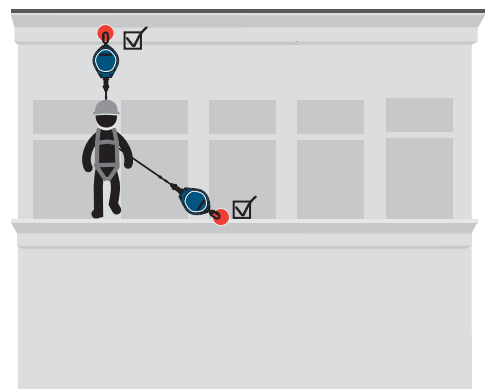


Diagram showing a dynamic test procedure:

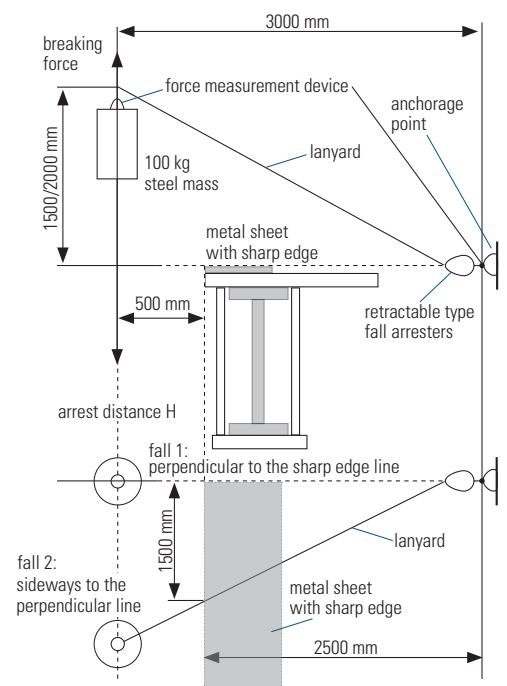

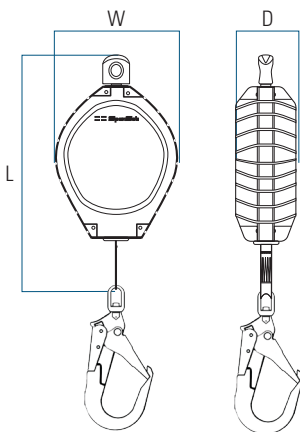

Saverline - SRL SDU A W 1.8 SRH

The Saverline - SRL SDU A W 1.8 SRH, plastic housed fall arrest block is a sturdy, low maintenance device fitted with a webbing lifeline. The attachment anchorage point on the fall arrest block is a cast aluminium swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge as described in ANSI/ASSE Z359.14-2014. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.

Lifeline Material	Polyester Webbing
Lifeline Length	5.91 ft / 70.87 in
Lifeline Width	0.06 ft / 0.75 in
Attachment point	Swivel eye attachment point \varnothing 0.05 ft / 0.63 in
Weight	1.54 lbs
Capacity Load	300 lbs
Dimensions (L x W x D)	0.78 x 0.26 x 0.20 ft / 9.33 x 3.07 x 2.36 in
Anchor Hook	2002456
Connection	2002206
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 ($r \geq 0,5 \text{ mm}$) + ANSI/ASSE Z 359.14-2014 ($r \geq 0,13 \text{ mm}$)
Body Material (ext)	Aluminium
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014
Temperature range	-40° C to + 50° C
Lifespan	10 Years



Saverline - SRL SDU A W 1.8 SRH

Global Item Number	2002442
EAN Code	7610726105236
Package Contents	Manual with SpanSet-Design

HEIGHT SAFETY

SAVERLINE



Saverline - Twin SRL A W 1.8 SRH


The Saverline - Twin SRL A W 1.8 SRH, plastic housed fall arrest block is a sturdy, low maintenance device fitted with a webbing lifeline. The attachment anchorage point on the fall arrest block is a cast aluminium swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge as described in ANSI/ASSE Z359.14-2014. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.

Lifeline Material	Polyester Webbing
Lifeline Length	5.91 ft / 70.87 in
Lifeline Width	0.06 ft / 0.75 in
Attachment point	Twin Interface Connector
Weight	3.53 lbs
Capacity Load	300 lbs
Dimensions (L x W x D)	0.95 x 0.56 x 0.20 ft / 11.42 x 6.69 x 2.36 in
Anchor Hook	2002456
Connection	2002523 / 2002524
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 ($r \geq 0,5\text{ mm}$) + ANSI/ASSE Z 359.14-2014 ($r \geq 0,13\text{ mm}$)
Body Material (ext)	Aluminium
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014
Temperature range	-40° C to + 50° C
Lifespan	10 Years



Saverline - Twin SRL A W 1.8 SRH

Global Item Number	2002522
EAN Code	7610726105250
Package Contents	Manual with SpanSet-Design

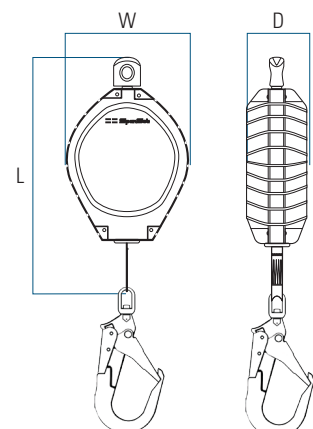



Saverline - SRL SDU A W 2 STA


The Saverline - SRL SDU A W 2 STA, aluminium housed fall arrest block is a sturdy, low maintenance device fitted with a webbing lifeline. The attachment anchorage point on the fall arrest block is a cast aluminium swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge as described in ANSI/ASSE Z359.14-2014. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.

Lifeline Material	Polyester Webbing
Lifeline Length	6.56 ft / 78.74 in
Lifeline Width	0.06 ft / 0.75 in
Attachment point	Swivel eye attachment point \varnothing 0.05 ft / 0.63 in
Weight	1.76 lbs
Capacity Load	300 lbs
Dimensions (LxWxD)	0.79 x 0.28 x 0.20 ft / 9.45 x 3.31 x 2.4 in
Anchor Hook	2002256
Connection	2002206
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 ($r \geq 0,5 \text{ mm}$) + ANSI/ASSE Z 359.14-2014 ($r \geq 0,13 \text{ mm}$)
Body Material (ext)	Plastic
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014
Temperature range	-40° C to + 50° C
Lifespan	10 Years



Saverline - SRL SDU A W 2 STA

Global Item Number	2002345
EAN Code	7610726105137
Package Contents	Manual with SpanSet-Design

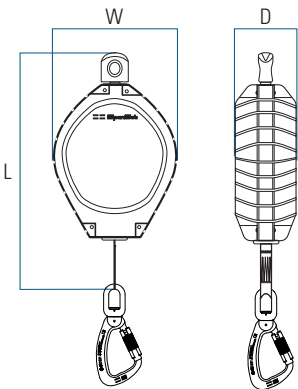



Saverline - SRL SDU P W 3.5 STA


The Saverline - SRL SDU P W 3.5 STA, aluminium housed double fall arrest block is a sturdy, low maintenance device fitted with a webbing lifeline. The attachment anchorage point on the fall arrest block is designed for the block to be attached to the safety harness. The lifeline in this fall arrest block has been tested in a simulated fall over an edge as described in ANSI/ASSE Z359.14-2014. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.


Lifeline Material	Polyester Webbing
Lifeline Length	11.48 ft / 137.80 in
Lifeline Width	0.08 ft / 0.98 in
Attachment point	Swivel eye attachment point Ø 0.05 ft / 0.63 in
Weight	2.65 lbs
Capacity Load	300 lbs
Dimensions (L x W x D)	1.07 x 0.34 x 0.26 ft / 12.83 x 4.09 x 3.07 in
Anchor Hook	2002256
Connection	2002206
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 (r = ≥ 0,5 mm) + ANSI/ASSE Z 359.14-2014 (r = ≥ 0,13 mm)
Body Material (ext)	Plastic
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014
Temperature range	-40° C to + 50° C
Lifespan	10 Years



Saverline - SRL SDU P W 3.5 STA

Global Item Number	2002347
EAN Code	7610726105151
Package Contents	Manual with SpanSet-Design

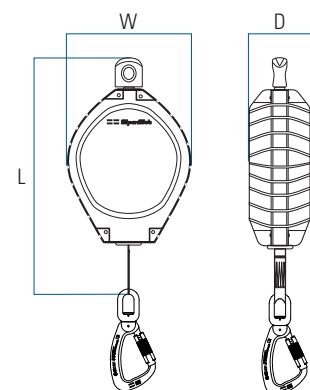

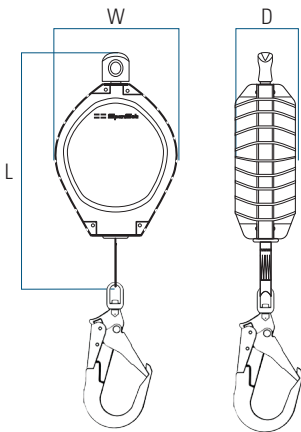

Saverline - SRL SDU P W 3.5 SRH


The Saverline - SRL SDU P W 3.5 SRH, plastic housed fall arrest block is a sturdy, low maintenance device fitted with a webbing lifeline. The attachment anchorage point on the fall arrest block is a cast aluminium swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge as described in ANSI/ASSE Z359.14-2014. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.

Lifeline Material	Polyester Webbing
Lifeline Length	11.48 ft / 137.80 in
Lifeline Width	0.08 ft / 0.98 in
Attachment point	Swivel eye attachment point \varnothing 0.05 ft / 0.63 in
Weight	2.65 lbs
Capacity Load	300 lbs
Dimensions (L x W x D)	1.07 x 0.34 x 0.26 ft / 12.83 x 4.09 x 3.07 in
Anchor Hook	2002256
Connection	2002456
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 ($r \geq 0,5 \text{ mm}$) + ANSI/ASSE Z 359.14-2014 ($r \geq 0,13 \text{ mm}$)
Body Material (ext)	Plastic
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014
Temperature range	-40° C to + 50° C
Lifespan	10 Years



Saverline - SRL SDU P W 3.5 SRH

Global Item Number	2002443
EAN Code	7610726105243
Package Contents	Manual with SpanSet-Design

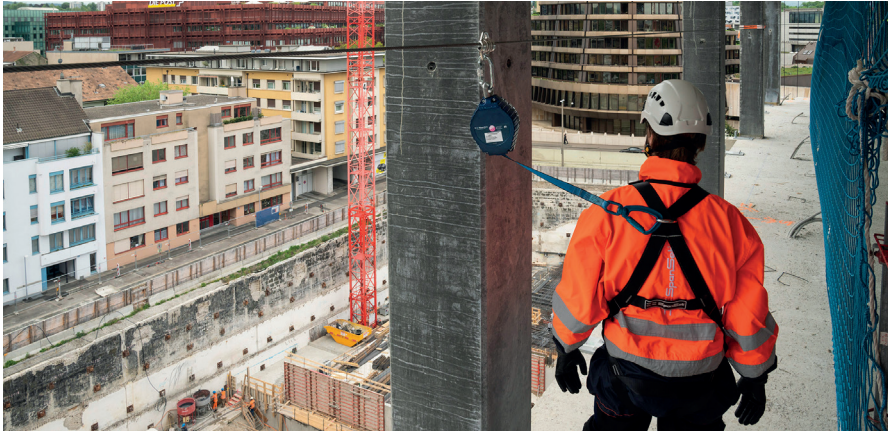

Saverline - SRL SDU P W 7 STA


The Saverline - SRL SDU P W 7 STA, plastic housed fall arrest block is a sturdy, low maintenance device fitted with a webbing lifeline. The attachment anchorage point on the fall arrest block is a cast aluminum swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge as described in ANSI/ASSE Z359.14-2014. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.


Lifeline Material	Polyester Webbing
Lifeline Length	22.97 ft / 275.59 in
Lifeline Width	0.08 ft / 0.98 in
Attachment point	Swivel eye attachment point $\varnothing 0.05\text{ ft} / 0.63\text{ in}$
Weight	3.97 lbs
Capacity Load	300 lbs
Dimensions (L x W x D)	0.98 x 0.54 x 0.26 ft / 11.81 x 6.50 x 3.15 in
Anchor Hook	2002256
Connection	2002206
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 ($r \geq 0,5\text{ mm}$) + ANSI/ASSE Z 359.14-2014 ($r \geq 0,13\text{ mm}$)
Body Material (ext)	Plastic
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014
Temperature range	-40° C to + 50° C
Lifespan	10 Years



Saverline - SRL SDU P W 7 STA

Global Item Number	2002349
EAN Code	7610726105175
Package Contents	Manual with SpanSet-Design

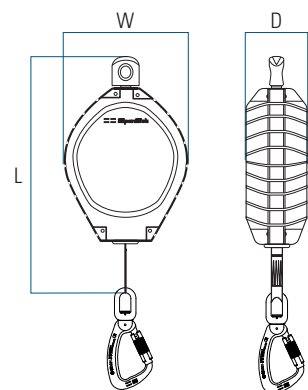

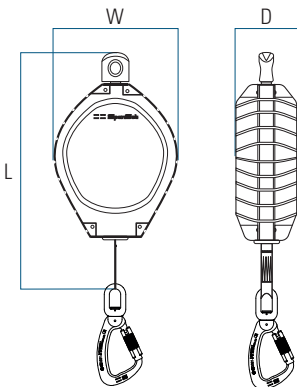

Saverline - SRL SDU P W 12 STA

The Saverline - SRL SDU P W 12 STA, plastic housed fall arrest block is a sturdy, low maintenance device fitted with a webbing lifeline. The attachment anchorage point on the fall arrest block is a cast aluminium swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge as described in ANSI/ASSE Z359.14-2014. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.


Lifeline Material	Polyester Webbing
Lifeline Length	12 m
Lifeline Width	0.08 ft / 0.98 in
Attachment point	Swivel eye attachment point \varnothing 0.05 ft / 0.63 in
Weight	7.5 lbs
Capacity Load	300 lbs
Dimensions (LxWxD)	1.21 x 0.64 x 0.31 ft / 14.57 x 7.68 x 3.74 in
Anchor Hook	2002256
Connection	2002206
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 (r = $\geq 0,5$ mm) + ANSI/ASSE Z 359.14-2014 (r = $\geq 0,13$ mm)
Body Material (ext)	Plastic
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014 ^{*1}
Temperature range	-40° C to + 50° C
Lifespan	10 Years

^{*1} CSAZ259.2.2 only with French Label available



Saverline - SRL SDU P W 12 ST

Global Item Number	2002351
EAN Code	7610726105199
Package Contents	Manual with SpanSet-Design

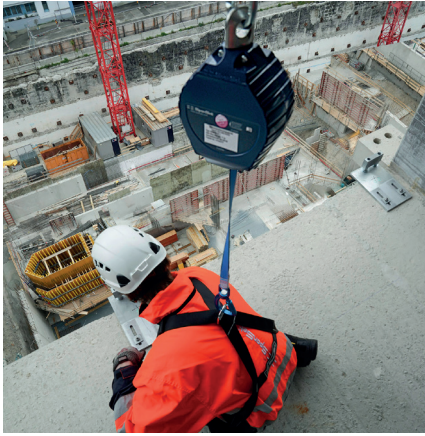

Saverline - SRL SDU P S 3 STA


The Saverline - SRL SDU P S 3 ATA, plastic housed fall arrest block is a sturdy, low maintenance device fitted with a steel rope. The attachment anchorage point on the fall arrest block is a cast aluminium swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge as described in ANSI/ASSE Z359.14-2014. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.


Lifeline Material	Galvanised Steel Cable
Lifeline Length	9.84 ft / 118.11 in
Lifeline Width	\varnothing 0.02 ft / 0.19 in
Attachment point	Swivel eye attachment point \varnothing 0.05 ft / 0.63 in
Weight	4.19 lbs
Capacity Load	300 lbs
Dimensions (L x W x D)	1.28 x 0.34 x 0.26 ft / 15.35 x 4.09 x 3.07 in
Anchor Hook	2002256
Connection	2002206
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 ($r \geq 0,5 \text{ mm}$) + ANSI/ASSE Z 359.14-2014 ($r \geq 0,13 \text{ mm}$)
Body Material (ext)	Plastic
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014
Temperature range	-40° C to + 50° C
Lifespan	10 Years



Saverline - SRL SDU P S 3 ST

Global Item Number	2002346
EAN Code	7610726105144
Package Contents	Manual with SpanSet-Design

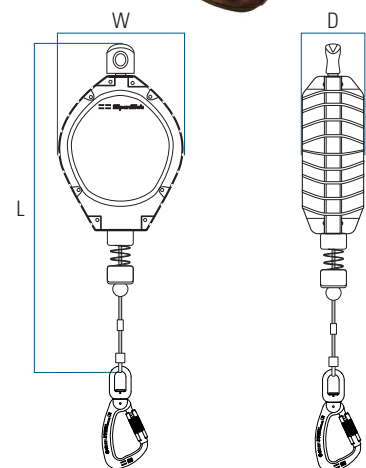

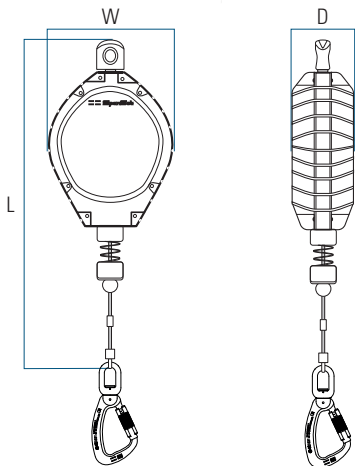

Saverline - SRL SDU P S 6 STA

The Saverline - SRL SDU P S 6 STA, plastic housed fall arrest block is a sturdy, low maintenance device fitted with a steelrope. The attachment anchorage point on the fall arrest block is a cast aluminium swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge as described in ANSI/ASSE Z359.14-2014. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.

Lifeline Material	Galvanised Steel Cable
Lifeline Length	19.69 ft / 236.22 in
Lifeline Width	$\varnothing 0.02$ ft / 0.19 in
Attachment point	Swivel eye attachment point $\varnothing 0.05$ ft / 0.63 in
Weight	5.51 lbs
Capacity Load	300 lbs
Dimensions (LxWxD)	1.38 x 0.48 x 0.26 ft / 16.54 x 5.71 x 3.15 in
Anchor Hook	2002256
Connection	2002206
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 ($r \geq 0,5$ mm) + ANSI/ASSE Z 359.14-2014 ($r \geq 0,13$ mm)
Body Material (ext)	Plastic
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014
Temperature range	-40° C to + 50° C
Lifespan	10 Years



Saverline - SRL SDU P S 6 STA

Global Item Number	2002348
EAN Code	7610726105168
Package Contents	Manual with SpanSet-Design



Saverline - SRL SDU P S 12 STA


The Saverline - SRL SDU P S 12 STA, plastic housed fall arrest block is a sturdy, low maintenance device fitted with a steel rope. The attachment anchorage point on the fall arrest block is a cast aluminium swivel eye $\varnothing 16\text{mm}$, suitable for connection via a Standard Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge as described in ANSI/ASSE Z359.14-2014. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.


Lifeline Material	Galvanised Steel Cable
Lifeline Length	39.37 ft / 472.44 in
Lifeline Width	$\varnothing 0.02\text{ ft} / 0.19\text{ in}$
Attachment point	Swivel eye attachment point $\varnothing 0.05\text{ ft} / 0.63\text{ in}$
Weight	10.58 lbs
Capacity Load	300 lbs
Dimensions (L x W x D)	1.64 x 0.64 x 0.31 ft / 19.69 x 7.68 x 3.74 in
Anchor Hook	2002256
Connection	2002206
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 ($r \geq 0,5\text{ mm}$) + ANSI/ASSE Z 359.14-2014 ($r \geq 0,13\text{ mm}$)
Body Material (ext)	Plastic
Chassis Material (int)	Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014
Temperature range	-40° C to + 50° C
Lifespan	10 Years



Saverline - SRL SDU P S 12 STA

Global Item Number	2002350
EAN Code	7610726105182
Package Contents	Manual with SpanSet-Design

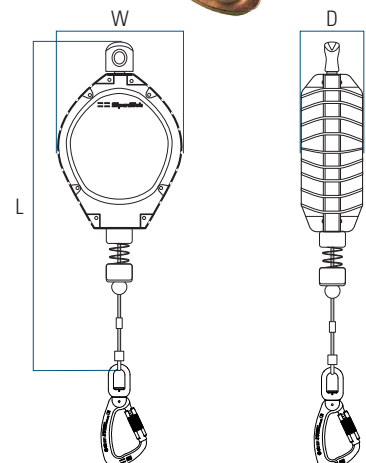

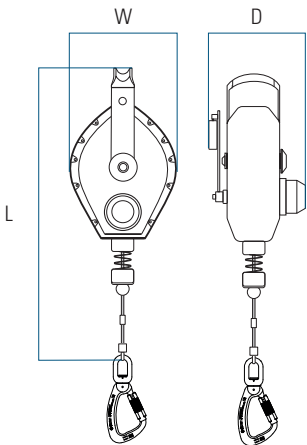

Saverline - SRLR A S 12 STA

The Saverline - SRLR AS12, aluminium housed fall arrest block with Rescue / Recovery is a sturdy, low maintenance device fitted with a steelrope. The attachment anchorage point on the SRLR STU A S12 STA is an open steel handle When a person suffers an accident such as loss of consciousness, they need to be rescued quickly and safely. The inbuilt inertia wheel recovery mechanism can be engaged by pulling the pin on the side of the block and engaging a winding handle. This then allows the device to be used to lift or to lower the casualty to safety and can be used as a retracting device to pull the person back up to safety. Alternatively, a second person can be clipped-in to ascent into the shaft to rescue the injured person.

Lifeline Length	12 m
Lifeline Width	Ø 4.8 mm
Attachment point	Steel Handle
Weight	7 kg
Capacity Load	136 kg
Dimensions (L x W x D)	450 x 195 x 180 mm
Anchor Hook	No anchor hook needed
Connection	2002206
Arrest Force	< 6 kN
Edge Tested	Not suitable for use over a leading edge and has not been edge tested
Body Material (ext)	Aluminium
Chassis Material (int)	Stainless Steel
Certification	EN 360, EN 1496, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014 *1
Temperature range	-40° C to + 50° C
Lifespan	10 Years
Lifespan	10 Years

*1 CSAZ259.2.2 only with French Label available

Please note: The winch is only for rescue. For general hoisting purposes with material loads, or with persons, winches are needed with dedicated certifications.

Saverline - SRLR STU A S 12 STA

Global Item Number	2002363
EAN Code	7610726104406
Package Contents	Manual with SpanSet-Design




Saverline - SRLR A S Series


The Saverline - SRLR AS, aluminium housed fall arrest block with Rescue / Recover is available in different lengths. For general information, please see page 15. Please note: The winch is only for rescue. For general hoisting purposes with material loads, or with persons, winches are needed with dedicated certifications.

Part Number	Lifeline Length	Weight	Dimensions (L x W x D)	Global Item Number	EAN Code
SRLR A S 18 STA	18 m	11,5 kg	570 x 240 x 200 mm	2002380	7610726104758
SRLR A S 24 STA	24 m	16 kg	630 x 275 x 220 mm	2002381	7610726104765
SRLR A S 30 STA	30 m	21 kg	640 x 315 x 230 mm	2002382	7610726104772
SRLR A S 42 STA	42 m	40 kg	740 x 370 x 235 mm	2002383	7610726104789
SRLR A S 65 STA	65 m	43 kg	780 x 390 x 240 mm	2002384	7610726104796



Saverline A S 65 STA

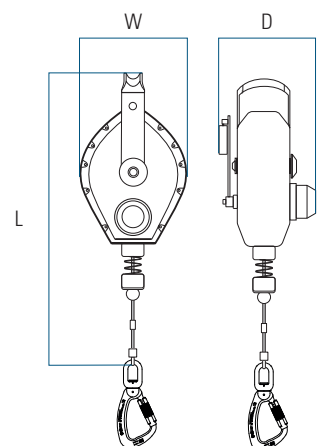

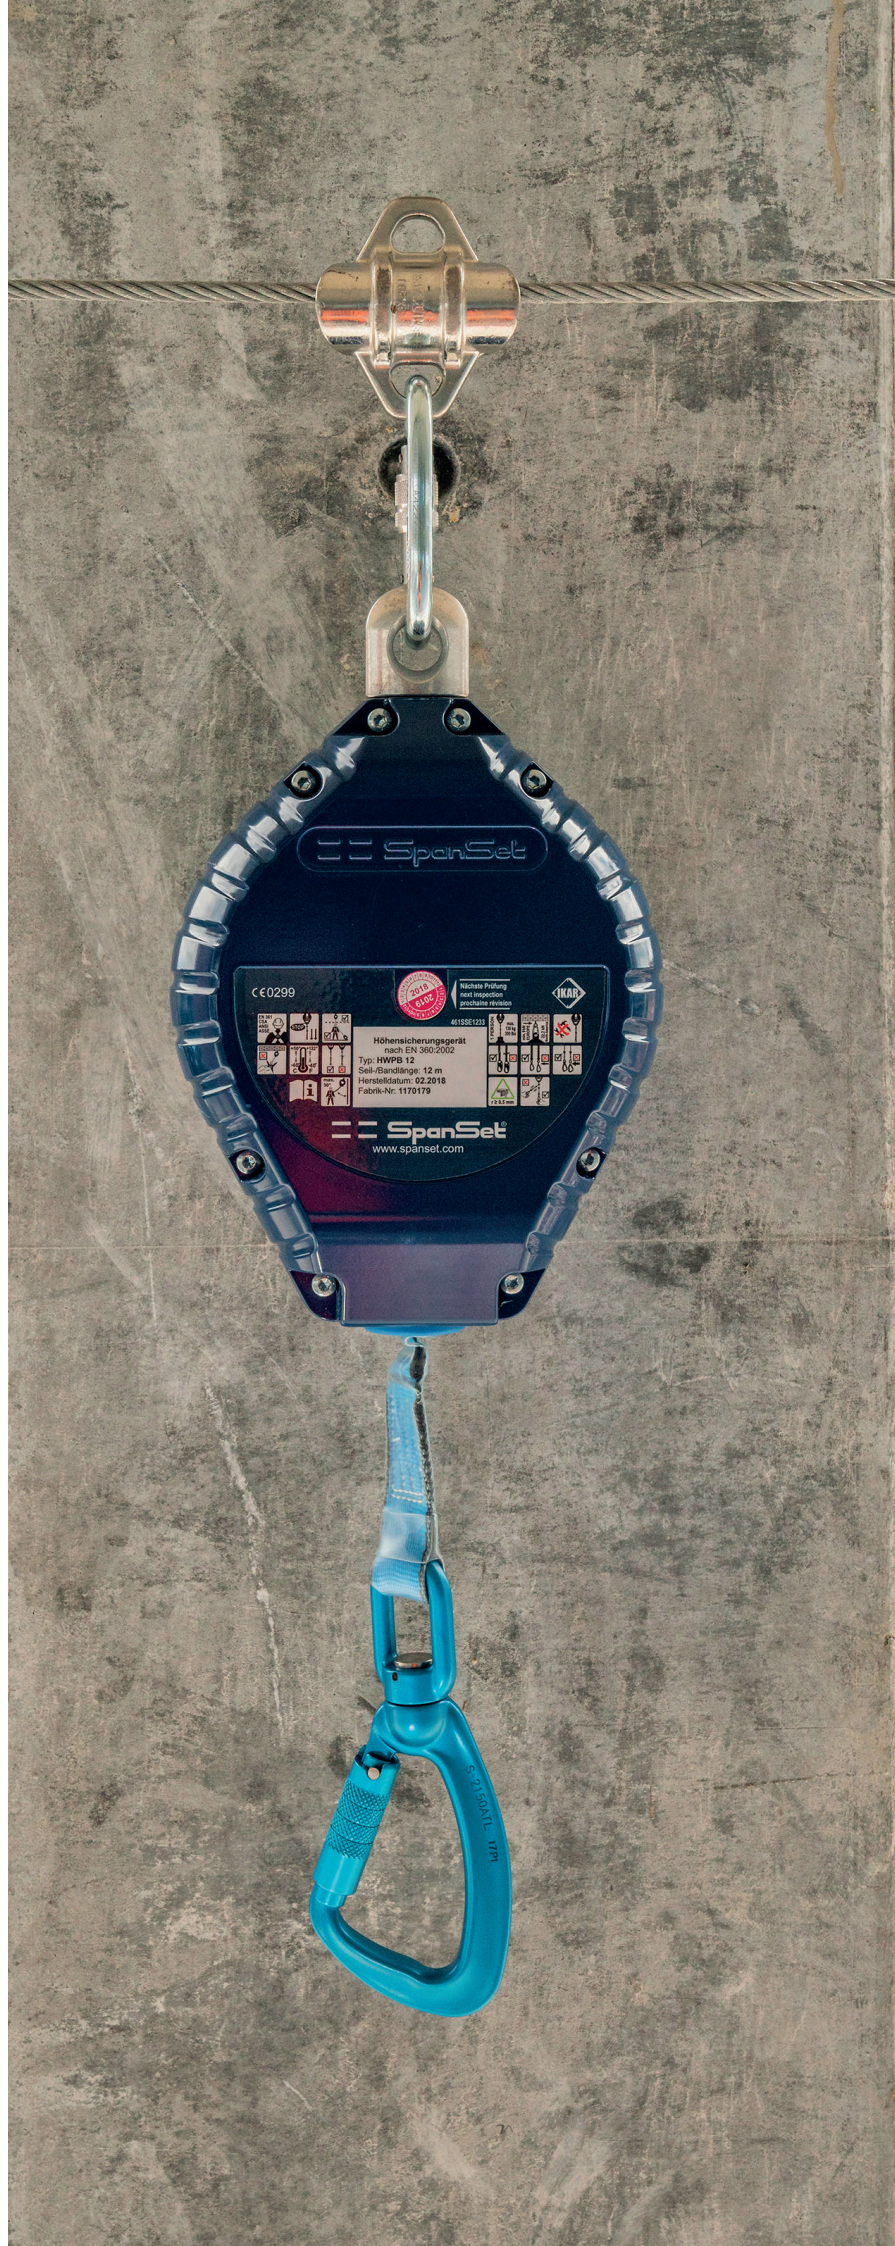


Meeting standards is good – Setting standards is better

We are quite proud of our achievements. After all, they have contributed to safer and easier working conditions around the world – and thus to fewer accidents and lower operating costs. We were especially glad to hear the story of a policeman, who during a truck check replaced his official severity with a friendly smile after seeing that the cargo was secured with our products.

The SpanSet brand stands for something. Not only for meeting international safety standards, but for raising them again and again. For example, the new EU lashing standard would not exist without our lashing belts. This is exactly what we stand for with our products, services and consultancy: for more security than is demanded today – namely, as much as is possible tomorrow. That is our goal, that is our job and that is our passion. So that those who work with SpanSet can also trust in it in the future – just like the police.

SpanSet – Certified Safety

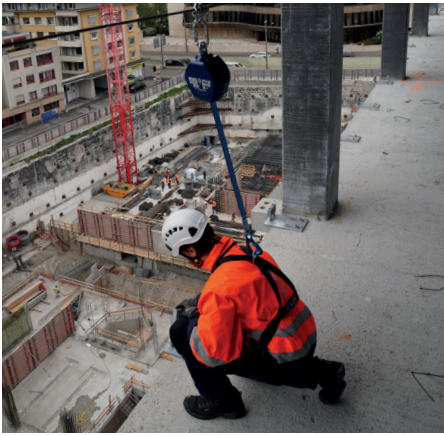

We can deliver everything out of one hand and give extensive consultancy and explanation about Height Safety, Lifting and Load Control

Height Safety

When working in heights, safety is vital – and SpanSet gives you this safety. With suitable, practical solutions that we specially develop and produce for you. Our sophisticated protective equipment and securing systems are easy to operate, comfortable to wear and guarantee optimal freedom of movement. For safe, concentrated and efficient work at any height.

We can offer you a wide range of:

- Harnesses
- Lanyards
- Anchorages
- Solutions for working in confined space
- Fall Arrest and Recovery Blocks
- Horizontal Lifelines
- Safety Lines
- Height Safety Kits
- Collective Measures

Lifting

Whatever you lift has to stay at the top. Our extremely hard-wearing round slings and webbing slings see to that. Decades of experience and solid quality craftsmanship stand behind these high-end textile products. Those who lift loads in cooperation with SpanSet put their trust in maximum safety and minimum time and effort.

We can offer you a wide range of:

- Roundslings
- Webslings
- Protective sleeves against sharp edges
- Joker Hooks
- Lifting Points ExoSet
- Lifting Chains
- Wire Ropes
- Lifting Beams

Load Control


Those who transport loads both large and small want to make sure they arrive safely. Our products and systems for securing loads master this task reliably, and we are always on par when international standards are set. With our cutting-edge tool, the SpanSet Lashing Calculator, we make it easier for you to calculate the required lashing equipment, thereby giving you added safety and economic efficiency. Our high production quality guarantees that everything stays where it belongs, even in critical situations and under special demands. And the solutions that we develop in close cooperation with our valued customers have the same centimetre accuracy.

We can offer you a wide range of:

- Heavy Duty Ratchet Lashing Straps 75 mm
- Medium Duty Ratchet Lashing Straps 50 mm
- Light Duty Ratchet Lashing Straps 25 mm
- Abrasion Protection
- Edge Protectors
- Anti Slip Products
- Lashing Points

Safety Management

For us, safety already begins early on. For example, when we advise your experts in the construction of machines that will later be transported and hoisted with SpanSet products. By providing our expertise from the beginning, we can work with you to achieve maximum work safety – including everything from special designs to inspection services to repairs. As a professional partner for safety management, we also enhance your competencies in hoisting technology, load securing and fall protection with a broad programme of seminars and training courses. Our goal is to make your work processes easier, safer and more economical. For this reason, we are there to support and advise you at all times.

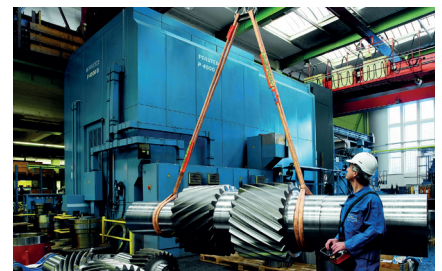

SpanSet®

SpanSet stands for Safety, Quality and Services

Inspections are essential in making sure your Saverline Self-Retracting Lifeline systems perform correctly. Once a year, a Competent Person should do a complete inspection of your Saverline blocks and all other fall protection equipment. We are certified to provide the necessary inspections to ensure your equipment perform correctly. Our highly skilled personnel can witness testing of Saverline SRL's service to ensure they are safe.



Properly functioning fall protection equipment is vital for every person who works at height. We pay attention to its condition and replace any component that looks damaged. Upon final inspection of each component, SpanSet records the results and the date in an inspection log.

SpanSet offer also training courses and technical advice for you to manage your own safety requirements. In some cases however the use of an external service provider to carry out this function as a whole is preferred. This approach passes the responsibility to SpanSet for all aspects of services. We can provide a service contract to suit your needs.

IDXpert Net®

Products requiring tracking and inspection can be retrofitted with an RFID transponder and managed within the IDXpert Net® system. Also, SpanSet products can be manufactured with an RFID transponder as original equipment. The IDXpert Net® system comprises of the online asset database, reading device, RFID transponder and the IDXpert Net® portal. The IDXpert Net® portal is always available to you, at any time and in any location. Your products with all of their details, their transaction histories, reports and their certificates are stored in this online portal and available with secure access.

SpanSet – Certified Safety

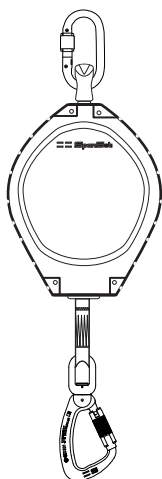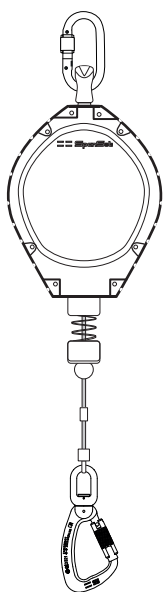

SpanSet, Inc.
3125 Industrial Dr
Sanford, NC 27332
Phone: 800.334.7505
www.spanset-usa.com

Subject to technical alterations. All rights reserved. No part of this catalogue may be reproduced or processed, duplicated or distributed using electronic systems in any form (print, photocopy, microfilm or any other procedure) without the written approval of the SpanSet company. This catalogue has been prepared with all due care; SpanSet accepts no liability for errors or omissions.