




### Textiler Anschlagpunkt

Erster textiler Anschlagpunkt mit geprüfter und garantierter Gesamt-WLL.

Artikel Name kurz	WLL kg Winkel 0° [kg]	WLL t Winkel 0° [t]	WLL kg Winkel 90° [kg]	WLL t Winkel 90° [t]	A [mm]	B [mm]	C [mm]
TXP-M16-50	1300	1.3	1300	1.3	30	34	60
TXP-M16-100	1300	1.3	1300	1.3	30	34	60
TXP-M20-50	2000	2	2000	2	30	34	60
TXP-M20-100	2000	2.0	2000	2	38	45	88
TXP-M24-50	3000	3	3000	3	38	45	88
TXP-M24-100	3000	3	3000	3	38	45	88

Artikel Name kurz	D [mm]	M [mm]	Nettogewicht kg [kg]
TXP-M16-50	57	16	0.82
TXP-M16-100	57	16	1.06
TXP-M20-50	57	20	1.6
TXP-M20-100	80	20	1.8
TXP-M24-50	80	24	2.6
TXP-M24-100	80	24	2.9



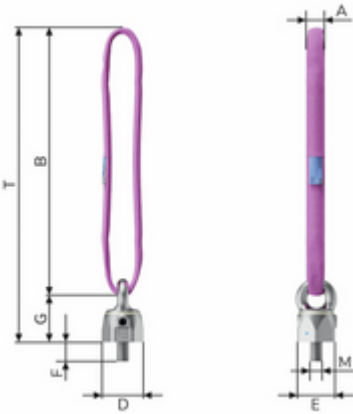

### BESTELLNUMMERN

Abmessung B	1.3 t	2 t	2.0 t	3 t
34 mm	2030301,2030302	2030303	-	-
45 mm	-	2030304	-	2030305,2030306

■ Normen	EN 1677 ISO 12100
■ Hauptmaterial	Stahl
■ Farbe	violett
■ Temperaturbereich	-40° C to + 200° C
■ Verpackungseinheit (VPE) Inhalt	1

