


Umreifungsgurt Typ AR10K mit Klemmschloss

25 mm-Umreifungsgurt, mit Klemmschloss, LC 250 daN

Artikel Name kurz	L1 [m]	Nettogewicht kg [kg]
SB LC250 25mm 1m Y	1	0.06
SB LC250 25mm 2m Y	2	0.08
SB LC250 25mm 3m Y	3	0.12
SB LC250 25mm 4m Y	4	0.13
SB LC250 25mm 5m Y	5	0.16
SB LC250 25mm 6m Y	6	0.17
SB LC250 25mm 7m Y	7	0.22
SB LC250 25mm 8m Y	8	0.23

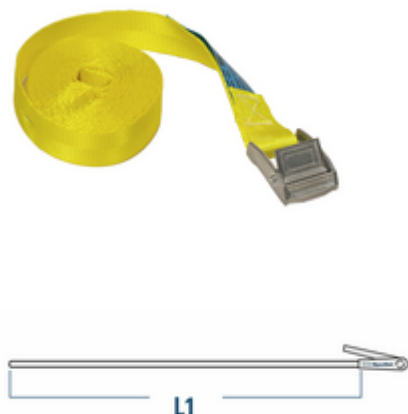

BESTELLNUMMERN

Abmessung L1	SB LC250 25mm 1m Y	SB LC250 25mm 2m Y	SB LC250 25mm 3m Y	SB LC250 25mm 4m Y	SB LC250 25mm 5m Y	SB LC250 25mm 6m Y	SB LC250 25mm 7m Y	SB LC250 25mm 8m Y
1 m	2013775	-	-	-	-	-	-	-
2 m	-	2013776	-	-	-	-	-	-
3 m	-	-	2013777	-	-	-	-	-
4 m	-	-	-	2013778	-	-	-	-
5 m	-	-	-	-	2013779	-	-	-
6 m	-	-	-	-	-	2013780	-	-
7 m	-	-	-	-	-	-	2013781	-
8 m	-	-	-	-	-	-	-	2013782

■ Normen	EN 12195-2
■ Farbe	Gelb
■ Gurtband Breite B	25 mm
■ Zurrkraft LC	250 daN
■ Temperaturbereich	-40° C to + 100° C
■ Etikettenschutz	Nein
■ Verpackungseinheit (VPE) Inhalt	1

