




VarioForce 2-brin





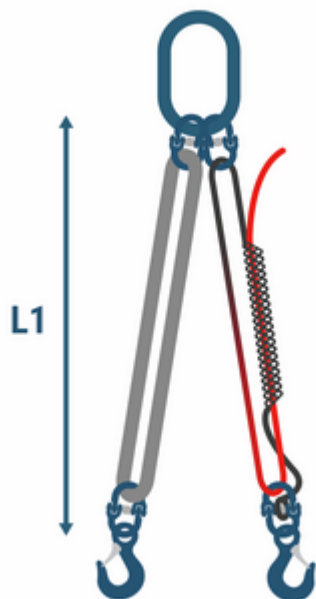

Soulever des charges asymétriques avec précision et rapidité!

Nom court de l'article	Anneau	Élément de crochet	WLL t Angle 0°- 45° [t]	WLL t Angle 45°- 60° [t]	L1 min. [m]	Poids pour 1m [kg]	Poids net [kg]
VF2-1000-ESHC	MLF-86-10	ESHC-6-10	1.4	1	1.5	2	3
VF2-1000-ESLH	MLF-86-10	ESLH-6-10	1.4	1	1.5	2	3
VF2-2000-ESHC	MLF-108-10	ESHC-8-10	2.8	2	1.5	3.6	5.5
VF2-2000-ESLH	MLF-108-10	ESLH-8-10	2.8	2	1.5	3.6	5.5
VF2-3000-ESHC	MLF-1310-10	ESHC-10-10	4.2	3	2.5	4.25	10.6
VF2-3000-ESLH	MLF-1310-10	ESLH-10-10	4.2	3	2.5	4.3	10.6

Nom court de l'article	Poids par mètre [kg/m]
VF2-1000-ESHC	0.6
VF2-1000-ESLH	0.6
VF2-2000-ESHC	0.9
VF2-2000-ESLH	0.9
VF2-3000-ESHC	1.2
VF2-3000-ESLH	1.2



NUMÉROS DE COMMANDE

Élément de crochet	1.4 t	2.8 t	4.2 t
 ESHC-6-10	2032308	-	-
 ESLH-6-10	2032311	-	-
 ESHC-8-10	-	2032309	-
 ESLH-8-10	-	2032312	-
 ESHC-10-10	-	-	2032310
 ESLH-10-10	-	-	2032313

■ Normes	based on EN 1492-2
■ Matériel principal	Fibres à haute résistance polyéthylène (HMPE)
■ Couleur	Noir
■ Plage de température	-40°C / +100°C
■ Contenu des unités d'emballage (UE)	1

