




VarioForce 3-brin





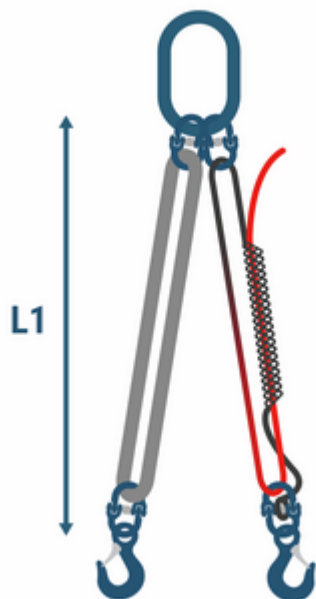

Soulever des charges asymétriques avec précision et rapidité!

Nom court de l'article	Anneau	Élément de crochet	WLL t Angle 0°- 45° [t]	WLL t Angle 45°- 60° [t]	L1 min. [m]	Poids pour 1m [kg]	Poids net [kg]
VF3-1000-ESHC	MLA-6-10	ESHC-6-10	1.4	1	1.5	4.2	5.8
VF3-1000-ESLH	MLA-6-10	ESLH-6-10	1.4	1	1.5	4.2	5.8
VF3-2000-ESLH	MLA-6-10	ESLH-8-10	2.8	2	1.5	5.6	8.5
VF3-2000-ESHC	MLA-6-10	ESHC-8-10	2.8	2	1.5	5.8	8.5
VF3-3000-ESHC	MLA-8-10	ESHC-10-10	4.2	3	2.5	12	16.1
VF3-3000-ESLH	MLA-8-10	ESLH-10-10	4.2	3	2.5	12	16.1

Nom court de l'article	Poids par mètre [kg/m]
VF3-1000-ESHC	0.9
VF3-1000-ESLH	0.9
VF3-2000-ESLH	1.2
VF3-2000-ESHC	1.2
VF3-3000-ESHC	1.5
VF3-3000-ESLH	1.5



NUMÉROS DE COMMANDE

Élément de crochet	1.4 t	2.8 t	4.2 t
 ESHC-6-10	2032314	-	-
 ESLH-6-10	2032317	-	-
 ESHC-8-10	-	2032315	-
 ESLH-8-10	-	2032318	-
 ESHC-10-10	-	-	2032316
 ESLH-10-10	-	-	2032319

■ Normes	based on EN 1492-2
■ Matériel principal	Fibres à haute résistance polyéthylène (HMPE)
■ Couleur	Noir
■ Plage de température	-40°C / +100°C
■ Contenu des unités d'emballage (UE)	1

