




### VarioForce 3-Strang





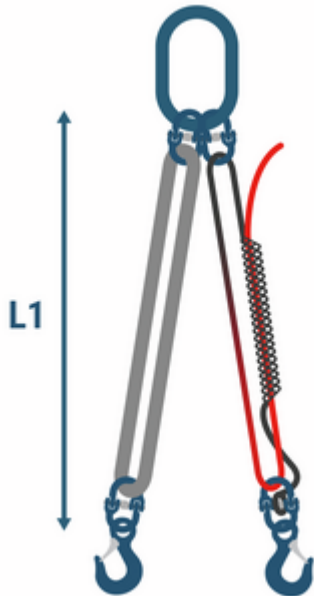

Präzise und schnell asymmetrische Lasten heben!

Artikel Name kurz	Öse	Haken-Komponente	WLL t Winkel 0°-45° [t]	WLL t Winkel 45°- 60° [t]	L1 min. [m]	Gewicht für 1m [kg]	Nettogewicht kg [kg]
VF3-1000-ESHC	MLA-6-10	ESHC-6-10	1.4	1	1.5	4.2	5.8
VF3-1000-ESLH	MLA-6-10	ESLH-6-10	1.4	1	1.5	4.2	5.8
VF3-2000-ESLH	MLA-6-10	ESLH-8-10	2.8	2	1.5	5.6	8.5
VF3-2000-ESHC	MLA-6-10	ESHC-8-10	2.8	2	1.5	5.8	8.5
VF3-3000-ESHC	MLA-8-10	ESHC-10-10	4.2	3	2.5	12	16.1
VF3-3000-ESLH	MLA-8-10	ESLH-10-10	4.2	3	2.5	12	16.1

Artikel Name kurz	Gewicht pro Meter [kg/m]
VF3-1000-ESHC	0.9
VF3-1000-ESLH	0.9
VF3-2000-ESLH	1.2
VF3-2000-ESHC	1.2
VF3-3000-ESHC	1.5
VF3-3000-ESLH	1.5



### BESTELLNUMMERN

Haken-Komponente	1.4 t	2.8 t	4.2 t
 ESHC-6-10	2032314	-	-
 ESLH-6-10	2032317	-	-
 ESHC-8-10	-	2032315	-
 ESLH-8-10	-	2032318	-
 ESHC-10-10	-	-	2032316
 ESLH-10-10	-	-	2032319

■ Normen	based on EN 1492-2
■ Hauptmaterial	Hochleistungsfasern polyethylen (HMPE)
■ Farbe	Schwarz
■ Temperaturbereich	-40°C / +100°C
■ Verpackungseinheit (VPE) Inhalt	1

