




### Vis de tension avec oeillets

Forgé à partir d'acier à haute résistance

Nom court de l'article	Envergure [mm]	WLL [kg]	WLL [t]	Poids net [kg]	Matériel principal	Couleur
SS003/4S	119	2360	2.36	2.03	-	-
SS005/8S	123	1590	1.59	1.33	-	-
SS001/2S	130	1000	1	0.81	Acier	Gris
SS003/4M	195	2360	2.36	2.47	-	-
SS005/8M	201	1590	1.59	1.61	-	-
SS001/2M	208	1000	1	1.07	-	-
SS003/4L	273	2360	2.36	2.90	-	-
SS005/8L	277	1590	1.59	1.96	-	-
SS001/2L	284	1000	1	1.29	-	-
SS003/4XL	425	2360	2.36	3.94	-	-



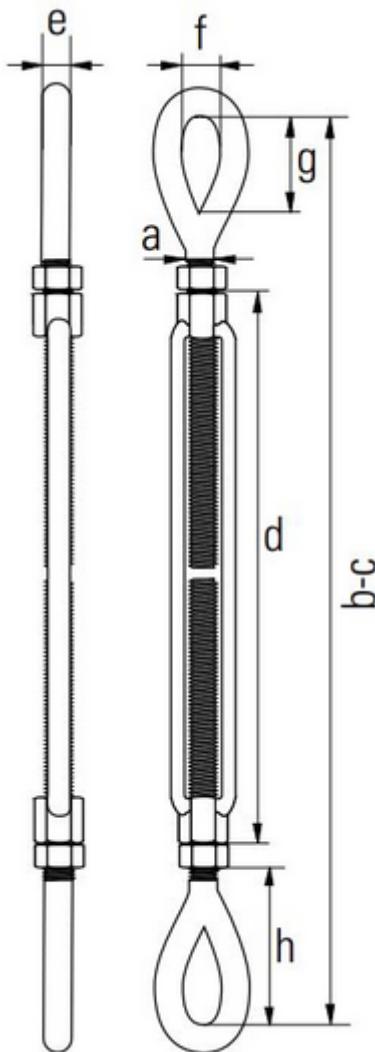

## NUMÉROS DE COMMANDE

Envergure	SS001/2S	SS001/2M	SS001/2L	SS003/4S	SS003/4M	SS003/4L	SS003/4XL	SS005/8S	SS005/8M	SS005/8L
119 mm	-	-	-	2020627	-	-	-	-	-	-
123 mm	-	-	-	-	-	-	-	2020624	-	-
130 mm	2020618	-	-	-	-	-	-	-	-	-
195 mm	-	-	-	-	2020628	-	-	-	-	-
201 mm	-	-	-	-	-	-	-	-	2020625	-
208 mm	-	2020622	-	-	-	-	-	-	-	-
273 mm	-	-	-	-	-	2020629	-	-	-	-
277 mm	-	-	-	-	-	-	-	-	-	2020626
284 mm	-	-	2020623	-	-	-	-	-	-	-
425 mm	-	-	-	-	-	-	2020630	-	-	-

■ Contenu des unités d'emballage (UE) 1