


## Crochet parallèle EXOSET® avec maillon de connexion



| Nom court de l'article | WLL<br>[kg] | Diamètre de la chaîne | WLL<br>[t] | A<br>[mm] | B<br>[mm] | I<br>[mm] | K<br>[mm] |
|------------------------|-------------|-----------------------|------------|-----------|-----------|-----------|-----------|
| HCGH-6-10              | 1400        | 6 mm                  | 1.4        | 76        | 50        | 9         | 16        |
| HCGH-8-10              | 2500        | 8 mm                  | 2.5        | 99        | 61        | 13        | 23        |
| HCGH-10-10             | 4000        | 10 mm                 | 4          | 119       | 75        | 15        | 26        |
| HCGH-13-10             | 6700        | 13 mm                 | 6.7        | 159       | 98        | 18        | 32        |
| HCGH-16-10             | 10000       | 16 mm                 | 10         | 190       | 126       | 23        | 38        |
| HCGH-20-10             | 16000       | 20 mm                 | 16         | -         | -         | -         | -         |
| HCGH-22-10             | 19000       | 22 mm                 | 19         | -         | -         | -         | -         |

| Nom court de l'article | L<br>[mm] | O<br>[mm] | Poids net<br>[kg] |
|------------------------|-----------|-----------|-------------------|
| HCGH-6-10              | 103       | 9         | 0.3               |
| HCGH-8-10              | 132       | 10        | 0.69              |
| HCGH-10-10             | 162       | 13        | 1.33              |
| HCGH-13-10             | 220       | 16        | 2.36              |
| HCGH-16-10             | 265       | 19        | 4.5               |
| HCGH-20-10             | -         | -         | -                 |
| HCGH-22-10             | -         | -         | -                 |

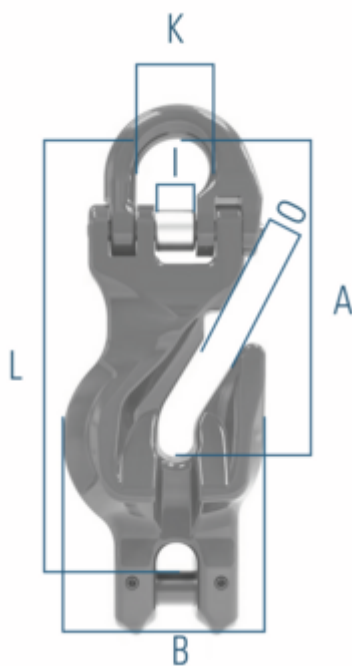

### NUMÉROS DE COMMANDE

| Diamètre de la chaîne | HCGH-6-10 | HCGH-8-10 | HCGH-10-10 | HCGH-13-10 | HCGH-16-10 | HCGH-20-10 | HCGH-22-10 |
|-----------------------|-----------|-----------|------------|------------|------------|------------|------------|
| 6 mm                  | 2025105   | -         | -          | -          | -          | -          | -          |
| 8 mm                  | -         | 2025106   | -          | -          | -          | -          | -          |
| 10 mm                 | -         | -         | 2025107    | -          | -          | -          | -          |
| 13 mm                 | -         | -         | -          | 2025108    | -          | -          | -          |
| 16 mm                 | -         | -         | -          | -          | 2025109    | -          | -          |
| 20 mm                 | -         | -         | -          | -          | -          | 2025110    | -          |
| 22 mm                 | -         | -         | -          | -          | -          | -          | 2025111    |

|                                       |                    |
|---------------------------------------|--------------------|
| ■ Normes                              | EN 1677            |
| ■ Classe                              | 100                |
| ■ Matériel principal                  | Acier              |
| ■ Couleur                             | Bleu               |
| ■ Plage de température                | -40° C to + 200° C |
| ■ Protection d'étiquette              | Non                |
| ■ Contenu des unités d'emballage (UE) | 1                  |

