




Schraubbarer Anschlagpunkt PowerPoint

Universalanschluss mit Haken für Ringgehänge, Rundschlingen, Drahtseile, Hakengehänge

Artikel Name kurz	WLL kg Winkel 0° [kg]	WLL t Winkel 0° [t]	WLL kg Winkel 90° [kg]	WLL t Winkel 90° [t]	A [mm]	B [mm]	C [mm]
PP-SM12	630	0.63	630	0.63	13	75	18
PP-SM16	1500	1.5	1500	1.5	20	97	25
PP-SM20	2500	2.5	2500	2.5	28	126	30
PP-SM24	4000	4	4000	4	36	150	35
PP-SM30	6700	6.7	5000	5	37	174	40
PP-SM36	10000	10	8000	8	49	208	48

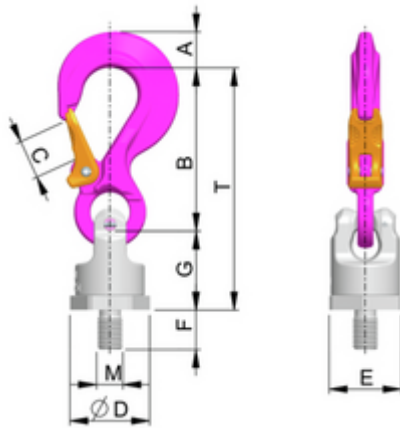

Artikel Name kurz	D [mm]	E [mm]	F [mm]	G [mm]	M [mm]	T [mm]	Nettogewicht kg [kg]
PP-SM12	40	36	18	41	12	116	0.4
PP-SM16	46	41	24	50	16	116	0.9
PP-SM20	61	55	30	61	20	187	1.7
PP-SM24	78	70	36	77	24	227	3.5
PP-SM30	95	85	45	93	30	267	7.5
PP-SM36	100	90	54	102	36	310	9.2

BESTELLNUMMERN

WLL t Winkel 0°	PP-SM12	PP-SM16	PP-SM20	PP-SM24	PP-SM30	PP-SM36
0.63 t	2009231	-	-	-	-	-
1.5 t	-	2009271	-	-	-	-
2.5 t	-	-	2009272	-	-	-
4 t	-	-	-	2009273	-	-
6.7 t	-	-	-	-	2009274	-
10 t	-	-	-	-	-	2009275

- Normen EN 1677 ISO 12100
- Hauptmaterial Stahl
- Farbe Rosa
- Temperaturbereich -40° C to + 200° C
- Verpackungseinheit (VPE) Inhalt 1

